



Reliable power and energy for everyone, everywhere

Offgrid and Ongrid Swiss made power



Unlock your solar potential with Studer

Swiss made power

Energy is essential for meeting human needs: light, heat, health, food, communication and education.

Solar energy has been used to cover basic needs for decades and is now on its way to transform the general energy supply of the world, promising a more sustainable future.

With decades of experience in this field, Studer Innotec offers products for solar energy access in all environments: for remote areas without the electrical grid (Offgrid) and for modern way of life with all the comforts of houses connected to electricity network (Ongrid).

1-2

Company

Working with Studer is a rewarding partnership that allows you to build business

3-14

Products

Our extensive range of smart inverters and solar charge controllers are the right fit for multiple applications

15-24

Applications

Powering a better future together, our aim is to bring sustainable energy everywhere

17-20 Offgrid

21-24 Ongrid

25-26

Monitoring

Keep an eye on your systems with professional tools

27-28

Let's collaborate

Partner with us to take your business to the next level

29-38

Datasheets

All technical details you want to know for each model



3000m (Switzerland)



4100m (Chile)



5000m (Peru)



6510m (Chile)


Clean energy since 1987

The company's factory is in Sion, where our innovating high-quality products are complemented by a human-sized service.

Studer is a family-owned company driven by Swiss innovation with +35 years of experience in power electronics for battery-based systems. Studer works to bring innovative power solution to remote areas, first in the mountains of Switzerland and then worldwide to cope with energy needs in rural electrification. Present in more than 150 countries with a network of 120+ Studer professional partners, Studer already has 500k systems globally installed. Reputation of the brand is built on the robustness and reliability of its products, and this allows our partners to build energy systems with confidence.


The company manufactures a wide range of excellent power electronic devices proposing exclusive solutions towards the energy transition. 35% of human resources are in R&D, to bring innovative products on the market. Quality and cutting-edge technology allows for unparalleled efficiency and reliability. The design, manufacture and testing activities are made in our ISO certified factory 9001:2020/14001:2020 in Switzerland with 100% renewable energy.

Picture: Sion (Switzerland)




1987

SST-02
First solar regulator




1995

TwinPower
First sine wave inverter




1998

Compact
First inverter charger still produced




2007

Xtender
First Xtender multi-unit system




2011

Variotrack
First solar MPPT charge controller




2014

VarioString
First High Voltage MPPT solar charge controller




2018

Studer Portal
Professional remote monitoring and control




2019

Easy Monitoring App
End-user remote monitoring



2021

Next3s
First 3-phase smart inverter charger all-in-one




2024

Next1
New battery inverter/charger for multiple applications

Products

Check out our extensive ranges of products

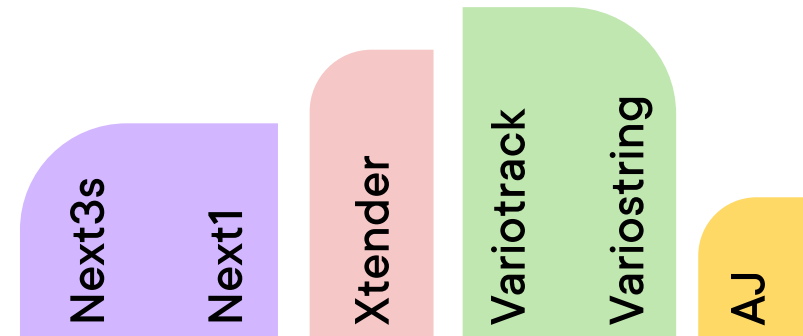

power range	15kVA	5kVA	700VA	625W	4.2kW	275VA
	-	-	-	-	-	-
	45kVA	20.5kVA	72kVA	75kW	105kW	2.4kVA

Number of models ¹	2	4	25	3	2	40
-------------------------------	---	---	----	---	---	----

Function	Inverter DC to AC	•	•	•			•
	Charger AC to DC	•	•	•			
	Solar DC to DC	•			•	•	option PWM
		MPPT			MPPT	MPPT	
	Gridfeeding	•	•	•			
	Multi-unit operation	3	9	9	15	15	-
	Flex ²	•	•				

Available for batteries	12V			•	•		•
	24V		•	•	•		•
	48V	•	•	•	•	•	•

Markets	Offgrid	•	•	•	•	•	•
	Ongrid	•	•	•	•	•	

¹ This includes various DC voltages, AC with 230V/50Hz or 120V/60Hz, optional solar variants

² Flex is an AC connection that can be configured as a second input or second output

Next3s, Next1
A new generation of smart inverter chargers

Integration example (Infra)
A complete energy infrastructure

Go to page 5

Xtender
Multi-functional offgrid battery inverters

Go to page 9

Vario
Low and high voltage MPPT solar charge controllers

Go to page 11

AJ
Pure sine-wave offgrid inverters



Go to page 13

Applications


Experience the future of sustainable power with our innovative solutions for all situations

See details pages 15 to 24

Offgrid

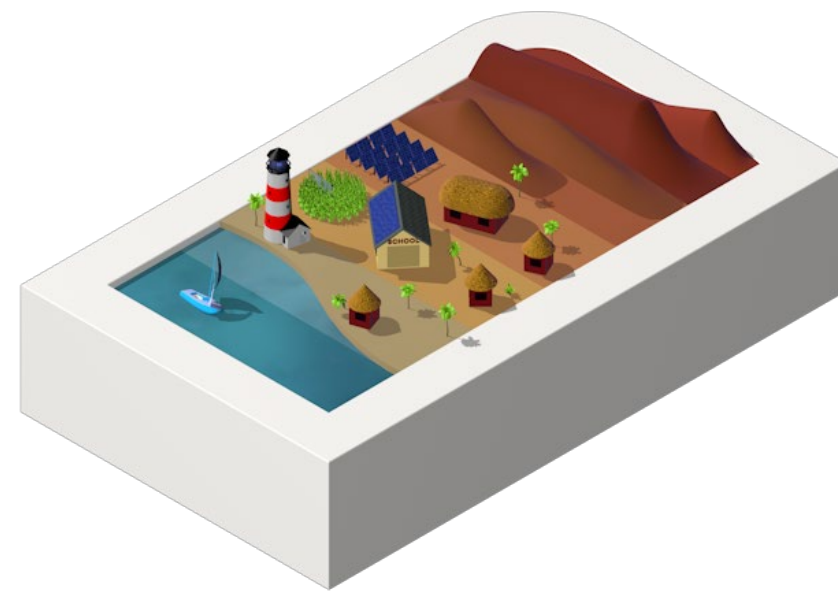

Ongrid

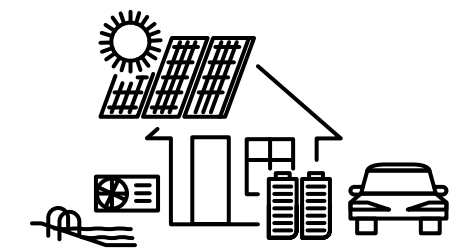

AC Solar Home Systems (SHS) page 17

The simple and robust **AJ series** provides a long-time validated solution for small systems in rural electrification projects.

Larger systems with **Xtender**, **Next** inverters and completed with a range of **Vario** solar mppt chargers.

Hybrid solar page 17-18

Genset managed in an optimal way with **Xtender + Vario**. Beyond your expectations with **Next**: all in one solar hybrid inverter of 15kW that work in parallel up to 45 kW.

Minigrid village electrification page 19

Centralized systems up to 72kW and smart decentralized minigrid are possible with **Xtender**. DC-coupling or AC-coupling configurations to integrate multiple sources.

Mobile power page 20

Caravanning, ambulance or boats: all need to have electricity when the engine is stopped

Solar Backup page 23

With week grids and long blackout, local solar production to complement storage is a must.

Solar self-consumption page 21

More than solar self-consumption, we propose self-sufficiency: storage of solar energy, operation in case of grid failure with an inverter that is designed with 35 years of experience in offgrid in the **Next** series.

Smart Energy Management page 22

Intelligent features ready for the grid of tomorrow: integration with EMS, ability to recharge EVs, AC-coupling with grid inverters and more...

And your application...

Flexibility is a characteristic of our products.

Next3s

100% offgrid, 100% ongrid

3-phase 16 kVA inverter-charger with 2 built-in solar MPPT inputs 8 + 8 kW.

The Next3s is the allrounder that can do it all: management of multiple gensets, 2x surge power in offgrid, different energy management possibilities, AC-coupling, the new AC flex connection, certified with main grid codes and many more...



More information

studer-innotec.com/next3

Page product including technical specifications.

Visit the downloads section for additional documents (datasheet, manual)

All-in-one

Straightforward installation and wiring. Up to 900Vdc MPPT input and 22 kWp installed solar power for flexible design. Full back-up capabilities with surge power. Compatible with modern grid-codes.

Multi-units

Possibility of multi-units (3x) for systems up to 45kW
One transfer of 80A (55 kVA)

Multiple battery technology

Lithium 48V with CAN-BMS, Lead-Acid, AGM, Super-Cap... (configurable). Advanced management of batteries for life optimization (B.L.O., adaptive SOC, ...)


Double AC-in or AC-out

The unique AC flex smart interface can be configured as a second source or an extra controlled load. Fully monitored connection for open possibilities: generator, EV charger, load management...

NextOS: open interface


An intuitive smart platform to configure, control and analyse your system. Open to the world with Internet monitoring, OTA update, API and MODBUS RTU/TCP control

Options & accessories




nx3 st

next3 full option (standard)




nx3 sti

next3 full option + interface



nx3 rack st

next3 full option (standard)




nx3 rack sti

next3 full option + interface



nx tempSensor

battery temperature sensor




nx interface

next3 user interface




nx wifidongle



nx bypass box


AC flex, the smart connection

AC flex is a three phased AC connection that can be configured at commissioning to be connected to an AC source or to AC loads, opening a range of possibilities in system design.

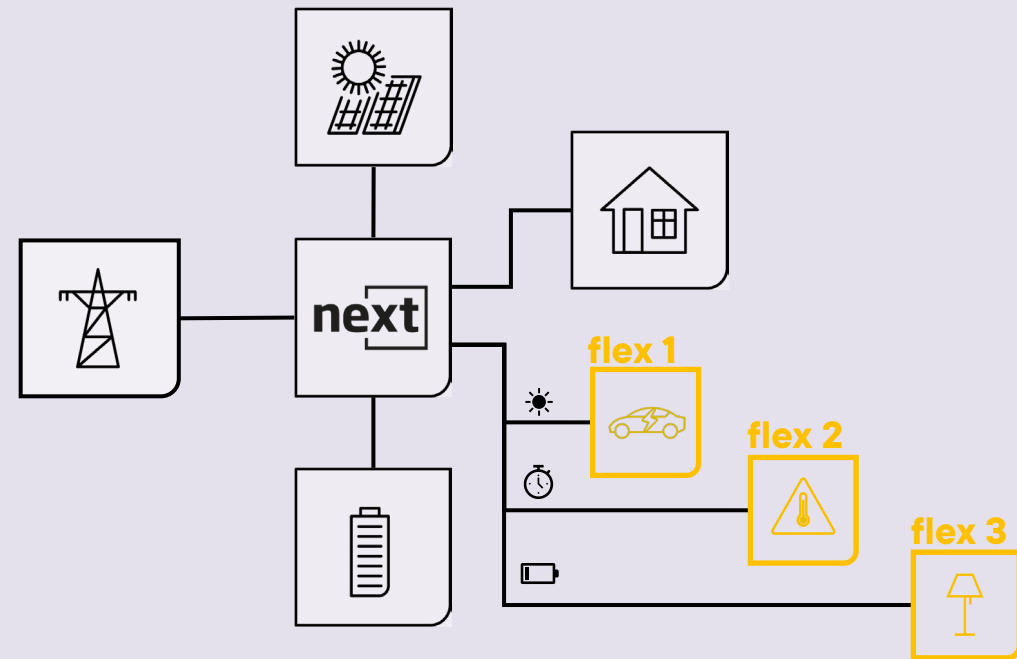

Use the AC flex connection to manage loads:


- A second fully monitored output, for a better energy use understanding
- A programmable connection/disconnection for load management (in function of SOC, solar production, grid power, ...), independent for each phase
- Connection of a solar inverter for a fully monitored AC coupling

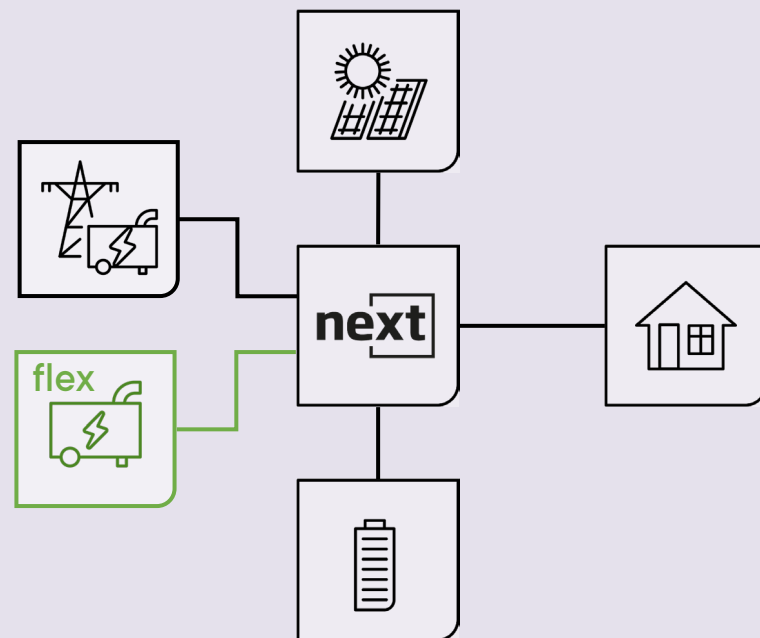


Use the AC flex connection to manage a second AC source:

- Have the standard grid connection complemented by a genset for emergency in case of long blackouts
- Stage two gensets in Offgrid for fuel efficiency


Residential smart self-consumption

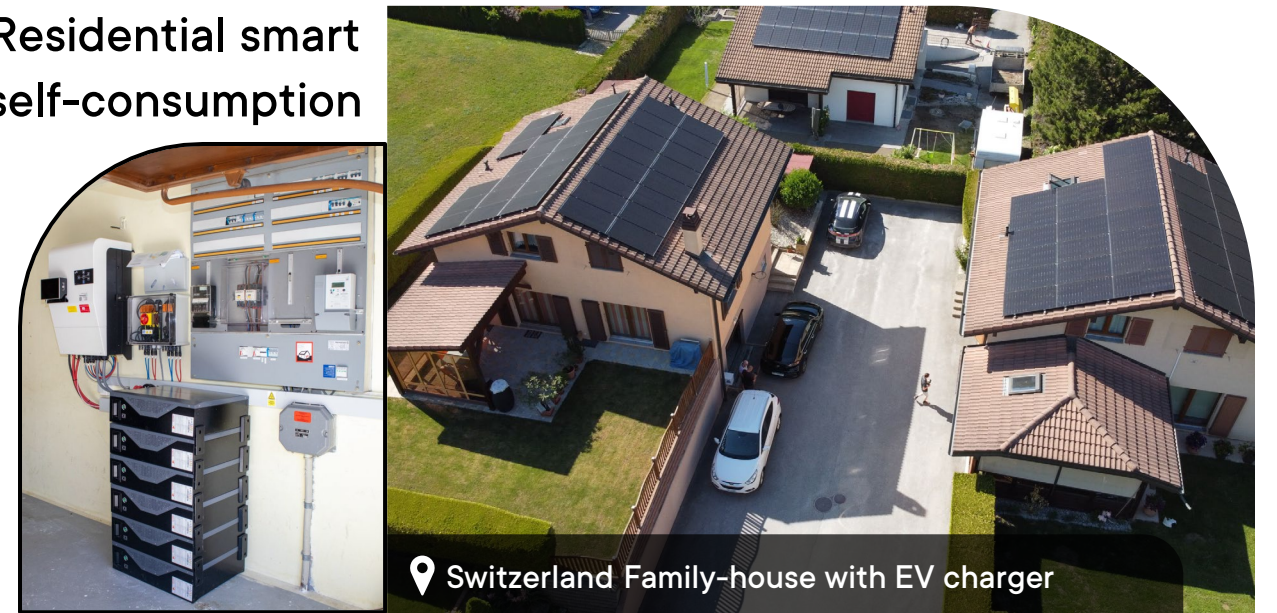

Backup, solar AC + DC

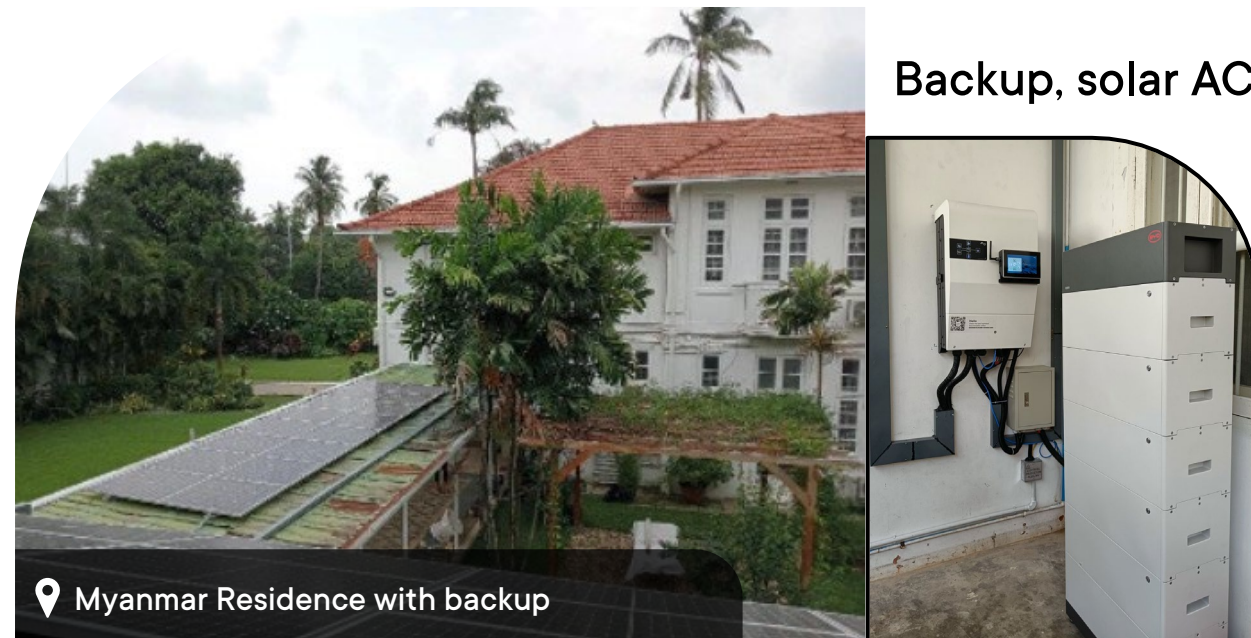

Offgrid

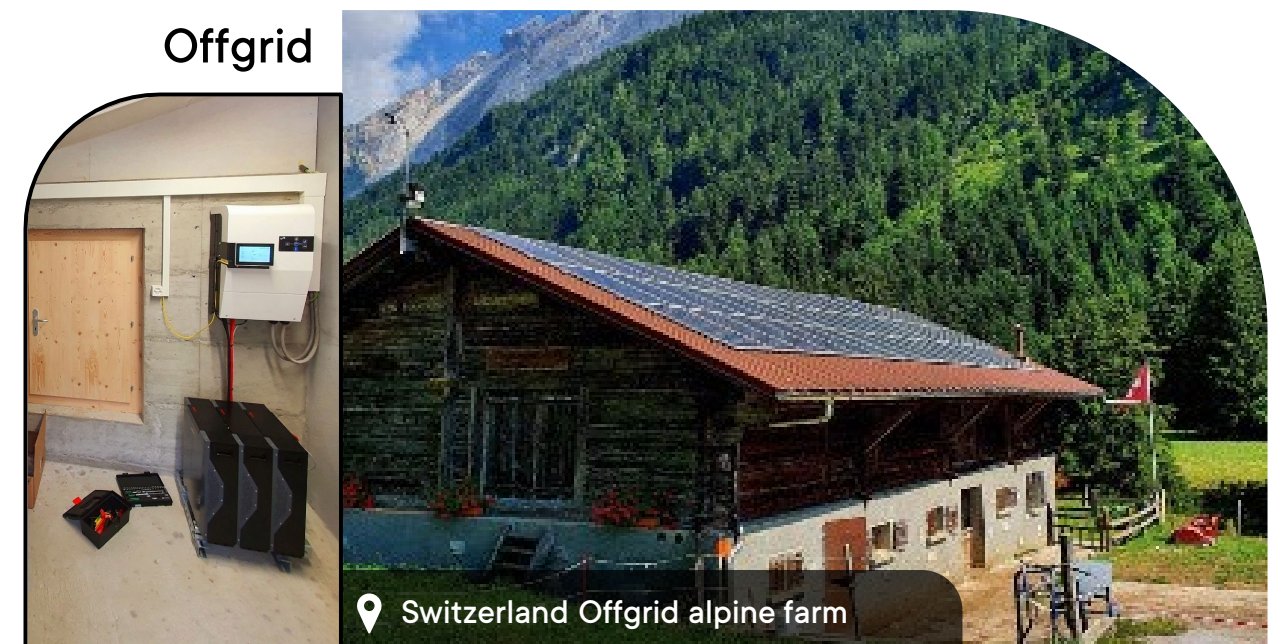

Next1


Smart inverter-charger

The heritage of 35 years of experience: a single-phase smart inverter-charger with low frequency topology ensuring the highest overload capability and the minimum standby consumption. All the best is in it for an unbreakable inverter: robustness, surge power, IP65.



IP65

nx1 6500-48
nx1 5000-24
wall mounted

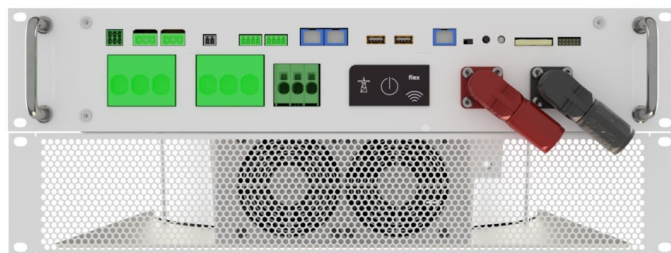

nx1 6500-48 rack
nx1 5000-24 rack



More information

studer-innotec.com/next1

Page product including technical specifications.

Visit the downloads section for additional documents (datasheet, manual)

100% offgrid, 100% ongrid

Full backup capabilities with peak power. Integrated double relays transfer switch compatible with last grid codes

Multi-units

Single-phase, bi-phase, three-phase, parallelling, up to 9 units per system is possible

Solar AC

AC-coupling of solar inverter for new or retrofit of installations

Solar DC

DC-coupling with Studer MPPT solar-charger for best efficiency

Multiple battery technology

Compatible with almost every battery technology. CAN-BMS integrated for lithium batteries and programmable voltage/current control for traditional lead-acid


Double AC-in or AC-out

The unique AC flex smart interface can be configured as a second source or an extra controlled load. Fully monitored connection for open possibilities: generator, EV charger, load management...

Embedded nextOS

Built-in connectivity: internet, webinterface, CAN BMS, Modbus TCP: your smartphone or tablet is the new nx interface with all the possibilities at no additional costs


Accessories and compatibility



nx interface
next user interface



nx tempSensor
battery temperature sensor




nx vario
solar charger controller





nx powermeter
AC meter for advanced EM

Full versatility for a great variety of energy applications

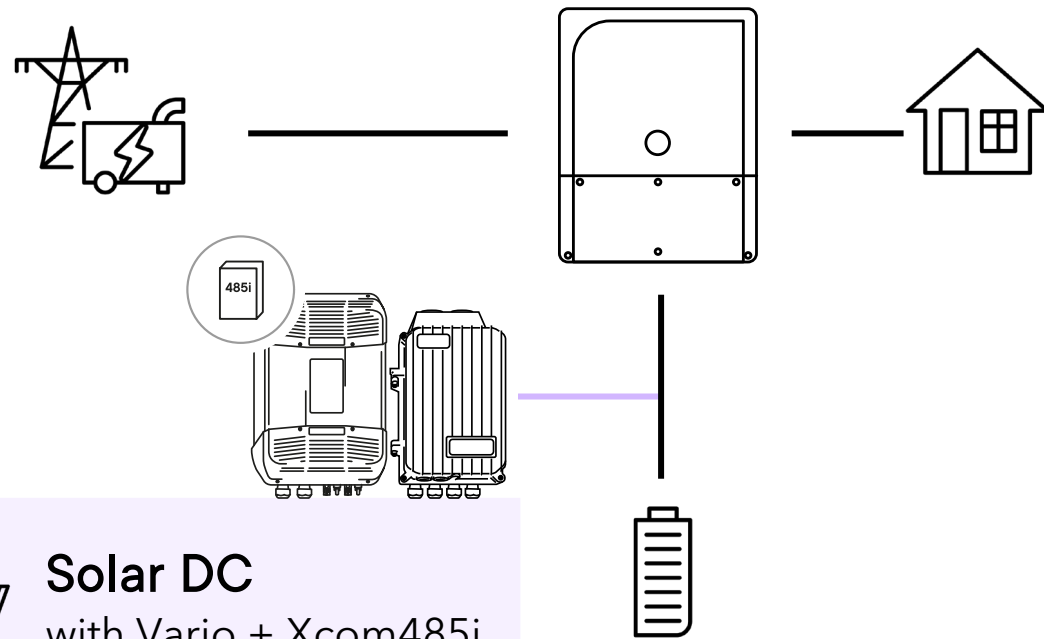

 **Solar DC**
with Vario + Xcom485i

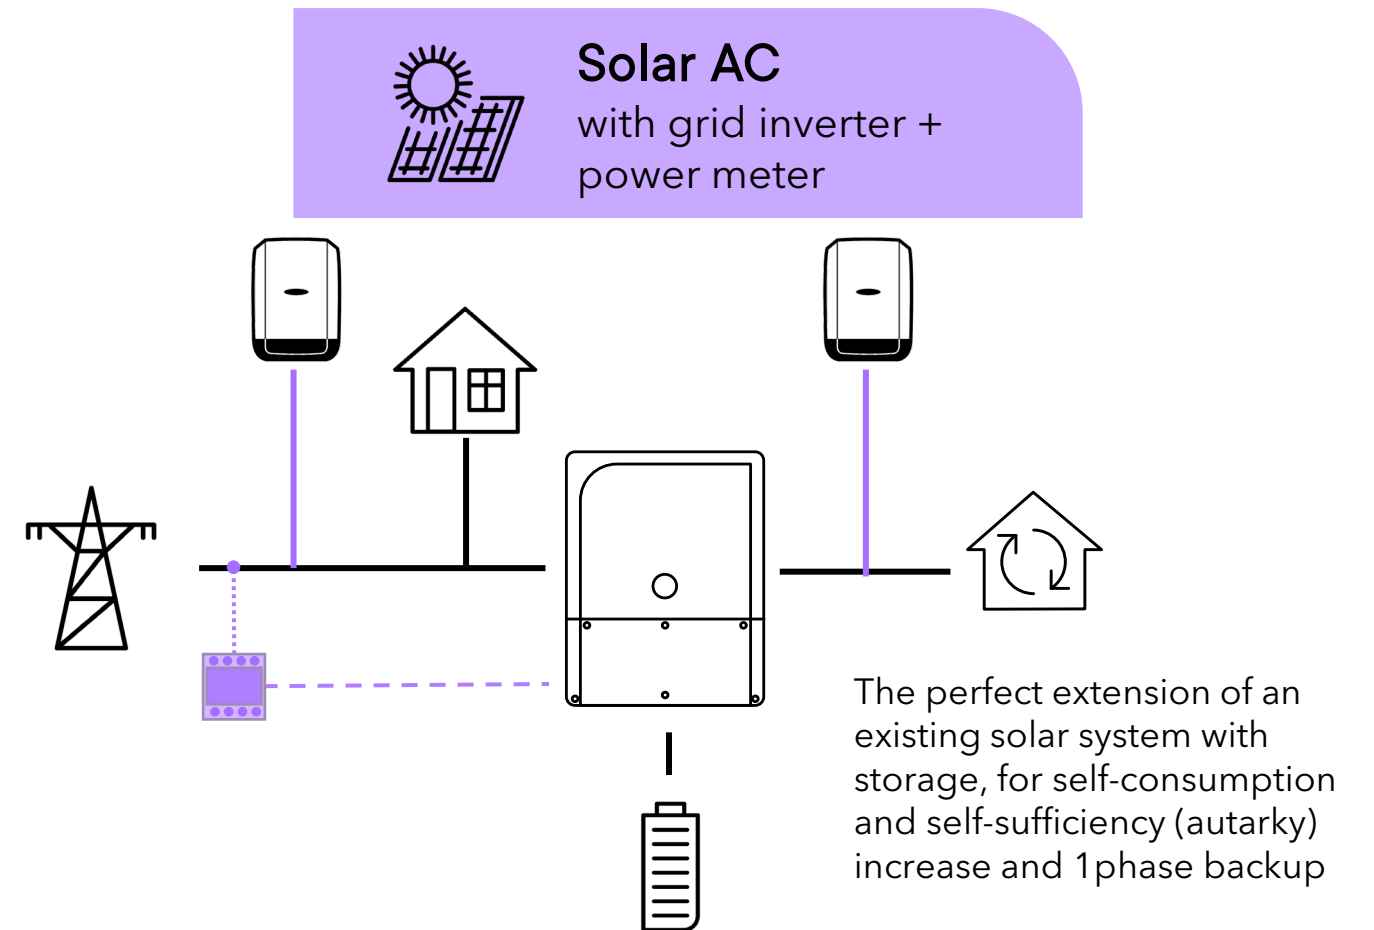

Solar AC
with grid inverter +
power meter

The perfect extension of an existing solar system with storage, for self-consumption and self-sufficiency (autarky) increase and 1phase backup

Your phone is the new nx interface



Everything is included in nx1!
Interface, wifi, internet monitoring,
local datalogging on USB stick.


- Rack 19" or wall-mounted version
- Included 80A transfer switch with double relay for ENS
- AC flex smart energy management 50A
- Ultra-low self-consumption
- Up to 9 units (1, 2 or 3-phase, up to 3 in parallel per phase)
- IP65 for the highest reliability (wallmounted version)
- 2 digital inputs, 2 analogic inputs, 2 auxiliary outputs
- Embedded communication: internet, wifi, webinterface
- Open communication with Modbus TCP, 485 for accessories
- Sinewave quality with minimal THD



Xtender

Multifunctional offgrid battery inverter-charger

A single-phase smart inverter-charger with low frequency topology ensuring the highest overload capability and the minimum standby consumption. Available for 12, 24 and 48V batteries.

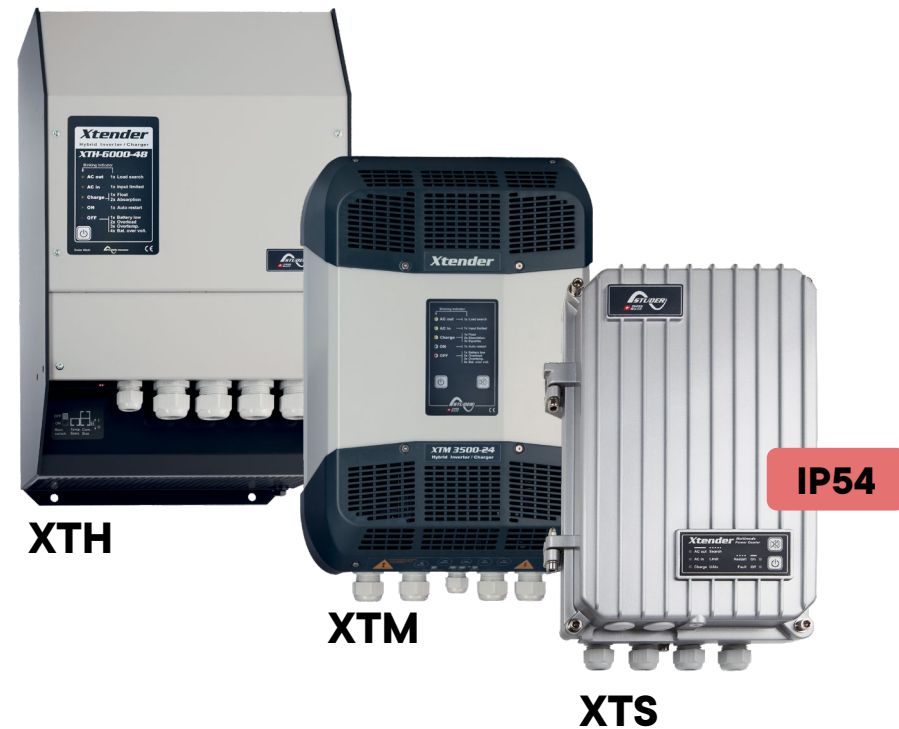

High overload capacity

3x nominal power

Low consumption

1W in standby mode

Multiuinit

Parallel, three-phase, split-phase, up to 9 units (72 kVA)

Distributed minigrid

Scalable configurations for rural electrification

Operating modes

ESS, solar priority, backup, UPS, peak-shaving, active filtering

Transfer time

Ultra-fast source connection/disconnection (0-15ms)

Solar AC and DC

AC-coupling of solar inverter for new or retrofit of installations. DC-coupling with Studer MPPT solar-charger for best efficiency


Multiple battery technology

Compatible with almost every 48V battery technology. CAN-BMS integrated for lithium batteries. 24V model for traditional lead-acid


Interface

Fully programmable with access to more than 300 settings with RCC

Compatible devices and accessories




vario
solar charge controller



ecf 01
Cooling fan for xts



xconnect
Three-phase mounting frame for xth



arm 02
External auxiliary contacts module



rcm 10
Remote control module



More information

studer-innotec.com/products/#xtender

Page product including technical specifications.

Visit the downloads section for additional documents (datasheet, manual)

Advanced battery accessories



bts 01
Temperature sensor




bsp
Advanced battery processor (lead-acid)



xcom CAN
Communication with lithium BMS

Display, datalogger, monitoring and communication



rcc 02/03
Configuration, display, datalogger



xcom LAN/GSM
Remote monitoring (Portal & App)



xcom 232i/CAN/485i
Communication bridges (openstuder)


Offgrid and solar backup

The Xtender is the best choice from simple hybrid systems to large multi-unit systems, proven by thousands of systems in operation worldwide!

It works as a fully integrated system with the solar MPPTs of the Vario series and multiple accessories.



72kW hybrid offgrid system in South Africa

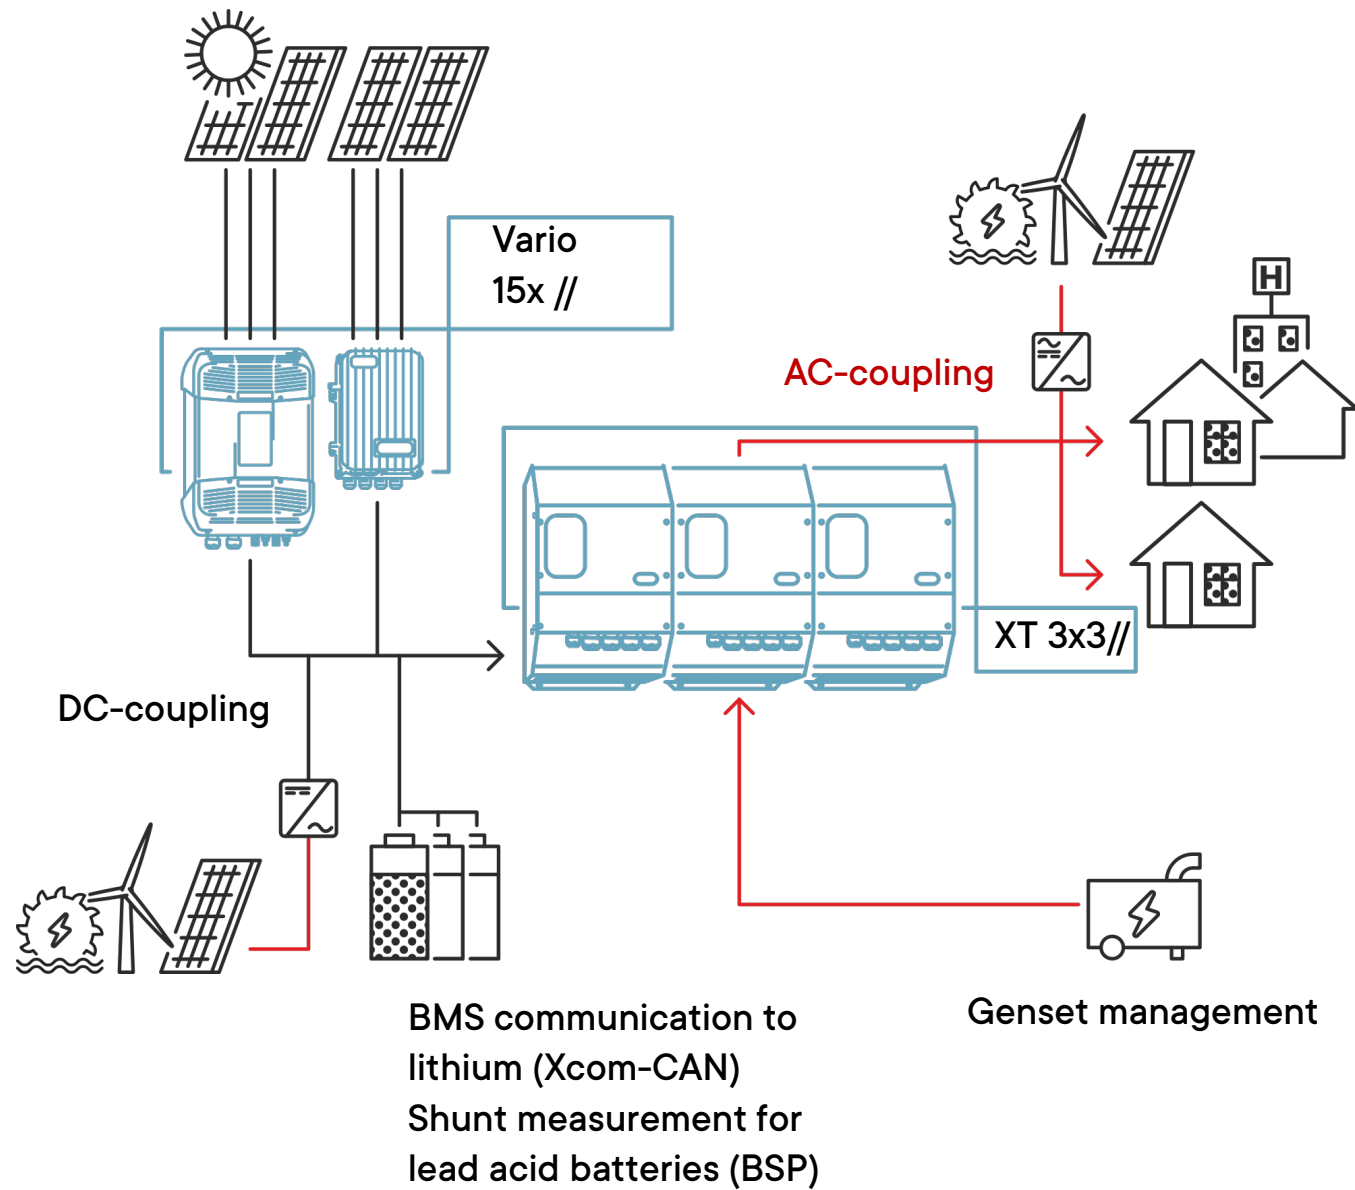

Powering huts of the Swiss Alpine Club



Vario

Low voltage (Variotrack) and high voltage (Variostring) MPPT solar charge controllers

A range of solar chargers able to cope with any solar modules configurations.



Compatible devices and accessories

vario
solar charge controller

xtender
battery inverter

arm 02
External auxiliary contacts module

ecf 01
Cooling fan for xts

More information

studer-innotec.com/products/#vario

Page product including technical specifications.

Visit the downloads section for additional documents (datasheet, manual)

Build systems

Up to 15 Variotrack/Variostring in parallel on the same communication bus (105kW/180kW), compatible with Xtender and next inverter ranges

Design flexibility

Variotrack: low voltage PV up to 150V

Variostring: high voltage PV up to 900V, save installation costs.

Low internal consumption

<1W in night time mode

Hydro & Wind

Suitable for any DC input voltage

Open configuration

Fully programmable charging curve and PV algorithm

Advanced battery accessories

bts 01

Temperature sensor

bsp

Advanced battery processor (lead-acid)

xcom CAN

Communication with lithium BMS

Display, datalogger, monitoring and communication

rcc 02/03

Configuration, display, datalogger

xcom LAN/GSM

Remote monitoring (Portal & App)


xcom 232i/CAN/485i

Communication bridges (openstuder)

Versatile solar MPPT charge controllers

The Variotrack and the Variostring work together with Xtender, Next1 or Next3s to build integrated solar systems.


It can work very well alone in purely 48V system like in telecom applications.

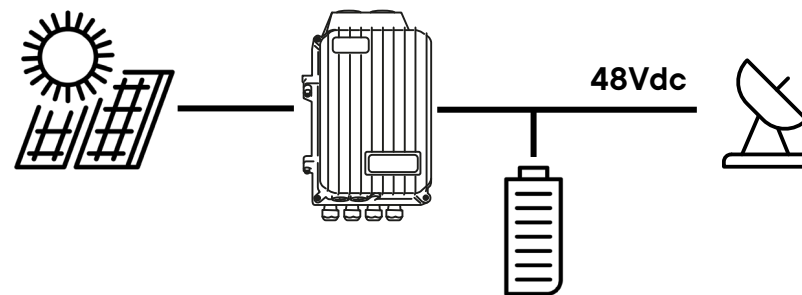

Itelazpi offgrid telecom tower, Spain



Cabane des Audannes: an appreciated trekking destination in the Alps, powered by solar and pico-hydro with a Studer system

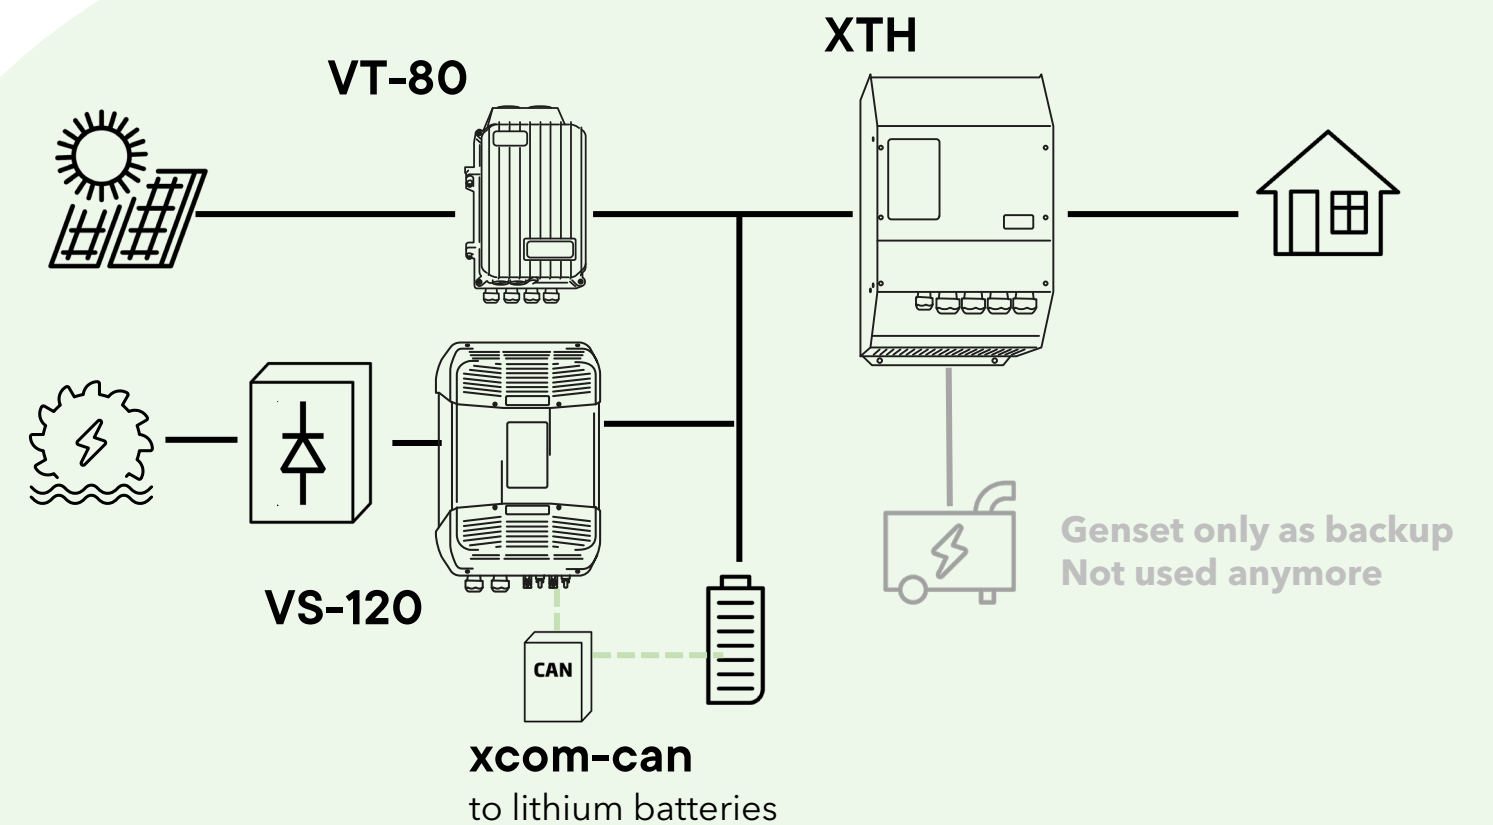

The Vario chargers have been used in standard solar systems as well as in special applications (pico-hydro, DC/DC converters, DC-minigrids) thanks to their flexibility in programming.

AJ

Reliable and compact for your small to medium sized system

The AJ series pure sinewave inverters convert battery voltage into high quality 230/120Vac which can be used for all electrical appliances.

Highly demanded for large electrification project due to its long track record of reliability.



Range overview

4 sizes of enclosure, all with each 3 standard battery voltage of 12/24/48 V and with a PWM solar charger in option.

	AJ 275-400	AJ 500-700	AJ 1000-1300	AJ 2100-2400
Nominal battery voltage	12/24/48 Vdc		12/24 Vdc	
Continuous power 25°C	200 - 300 VA	400 - 500 VA	800 - 1000 VA	2000 VA
Power 30 min. 25°C	275 - 400 VA	500 - 700 VA	1000 - 1300 VA	2100 - 2400 VA
Power 5 sec. 25°C	450 - 1000 VA	1000 - 1400 VA	2200 - 2800 VA	5000 - 5200 VA
Output voltage frequency	sine wave 230 Vac (120 Vac*) ±5% 50 Hz (60 Hz*) ± 0.05 % (crystal controlled)			
Weight	2.4 - 2.6 kg	4.5 kg	8.5 kg	18 - 19 kg
Dimensions h/w/l	142/163/84 mm	142/240/84 mm	142/428/84 mm	273/399/117 mm
Ingress Protection	IP 30		IP 20	
Remote control	rcm01/02/03		jt8	

High overload capabilities

2.5 times the nominal power P_{nom}

Low internal consumption

<1W in standby mode, low consumption ON with LF topology

Battery Lifetime Optimization

BLO function protects battery aging

Make the job

Pure sinewave, supply to any type of appliance, full internal protection, robust and proven

Plug and play


Supplied with DC and AC cables

Offroad

200% offgrid

Available in a large range with many options

Options

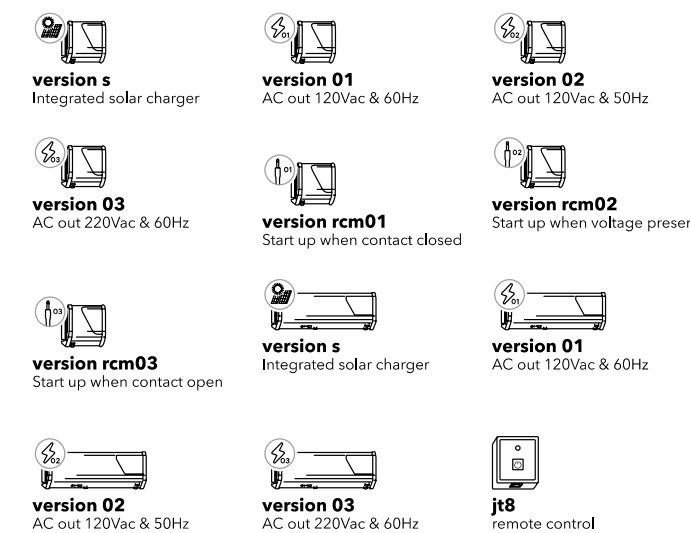

More information


studer-innotec.com/products/#aj
Page product including technical specifications.
Visit the downloads section for additional documents (datasheet, manual)



AC Home


Solar Home Systems (SHS) play a crucial role in rural electrification by addressing basic needs in areas where access to electricity from the main grid is limited or unavailable. Here are some of the basic needs covered by SHS in rural electrification:

- Lighting
- Communication: phone charging, radios or televisions
- Education: With lighting provided by SHS, children can study after dark, improving educational opportunities and academic performance
- Healthcare: power medical equipment and fridges
- Productivity: powering equipment and machinery
- Water Pumping

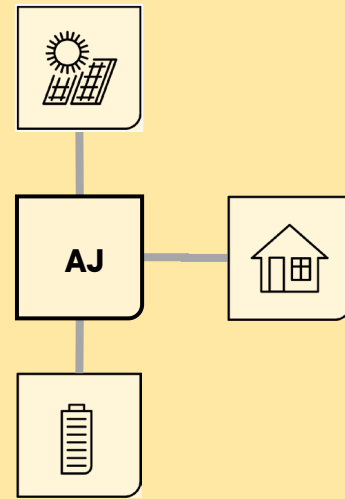

All in one SHS with solar option (-S)

Advantage of AC is the use of commonly available and today efficient AC appliances.

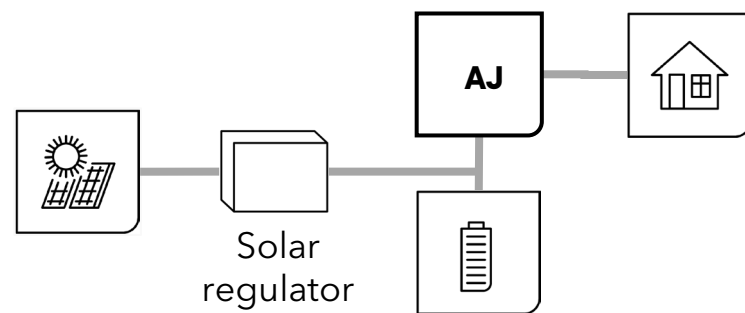

Pure sine wave inverter for houses, mobile applications or specific applications



Water pumping and disinfection



Rural electrification projects

The AJ inverter is recognised and advised by NGO and governments. Not the most modern device but known for its reliability in the field.




Offgrid solutions





Ongrid solutions

- Solar Home Systems, SHS
- Hybrid systems
- Village electrification, minigrids
- Telecom
- Mobile applications
 - Caravaning
 - Leisure vehicles
 - Professional vehicle




What can you do with the Studer products?

- Enhance your residential or small commercial and industrial system with:
 - Selfconsumption and Selfsufficiency (Autarky)
 - Backup - Grid blackouts ready
 - Extension/retrofit of existing solar
 - Grid booster

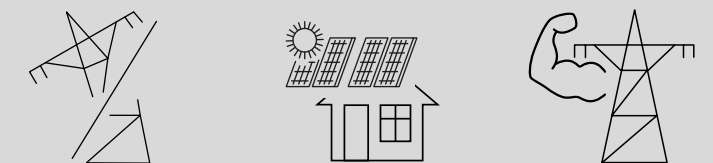


Integrate multiple sources of energy

Full grid interactive



Advanced genset management 

Full backup, devices made for offgrid, no derating




Ready for all types of batteries. Compatible with a large number of BMS

We bring solutions to each situation

Unique technical features of Studer inverters, do not hesitate to ask for more

I have a weak grid with a low power connection capacity

Our device performs **peak shaving** function with the **Smart Boost**, which means above a given load, the power automatically comes from the battery to compensate. Very useful with underdimensioned grids or limited connections.



My generator doesn't stand asymmetrical loads

The smart **phase balancing** of the Next3s associated with the artificial inertia algorithm guarantee optimal use of genset.




Can you guarantee that your inverter will be able to start my load?

Surge power capacity is a tradition in Studer products. It is very important in offgrid systems to cope with starting loads and transitions. That is where we make a difference! Did you know that asynchronous motors have starting current up to more than 5 times the nominal?




I have a weak grid and I want to have a backup genset

The Next can be configured with two AC sources (grid + genset). The **AC-Flex** input port can be used for the connexion of a genset as backup. Xtender can also manage two sources with an external ATS.



I'm producing on phase1 and consuming on phase2. The balance is zero but my DSO charges for the consumption

The **smart phase balancing** compensate just what is necessary to minimize your bill. A full grid phase balancing is possible, in that case the power taken on the AC-source is always absolutely symmetrical.




I need larger power than the biggest inverter

Our Xtender inverter can work in multi-units system 3x **parallel** and in **3 phases**, building systems up to 72kW. The Next3s is a three phased inverter that can work in parallel up to 3 units / 45kW.




I only need 3-phased AC for a small motor; the rest is 1-phased

A system can be **asymmetrical in threephased**: it is possible to have a strong phase with a large inverter (XTH) and weaker phases with smaller models (XTS). It is also possible to have multiple units on one phase only.



I need an integration in the SCADA system of the building

This is possible with standard communication, **MODBUS** RTU (Xtender, Next) and MODBUS TCP (Next) with opensource examples and ressources available (GitHub).



I want to perform load shedding with various modes of operations

The Studer inverters have freely **programmable contacts** and **input**. This allows for simple automation tasks without external PLC. The **AC-flex** of Next series is a monitored connection that can be freely programmed.



My batteries are expensive, how to make them last as long as possible

Intelligent management is in all our products. Algorithms are embedded in all units to control the depth of discharge (DOD), the regular recharge for calibration. See the **B.L.O. (Battery Life Optimizer)** in AJ and Xtender and **adaptive SOC** function in Next3s.



I need to understand what happened in my customer's system

Monitoring tool with advanced technical details is available for the professionals on our **webportal**. Easy Monitoring App is simpler and more dedicated to the end customer.




More questions? Contact our team



Offgrid applications

Proven, reproduced thousands of times, reliable

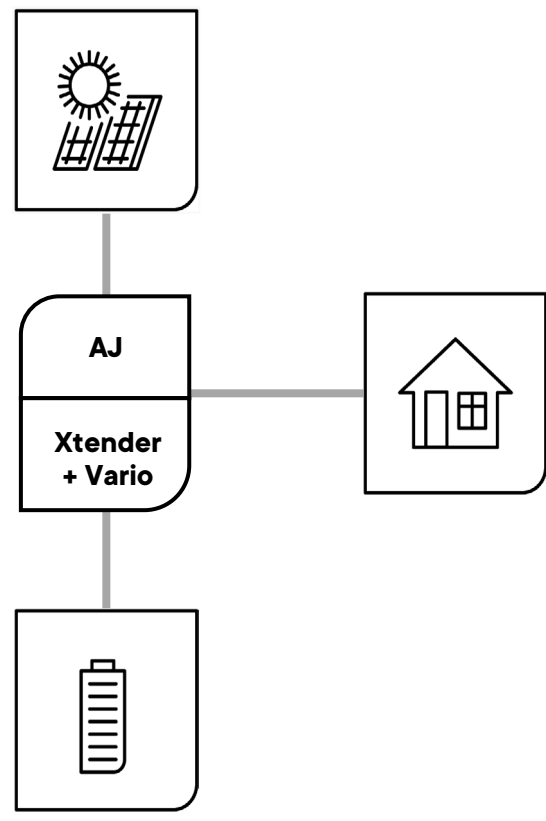


Solar home system in altitude in the Swiss Alps

AC Solar Home Systems SHS

SHS power small houses with the basic needs in AC: lights, phone recharge, fridges for food and vaccines in hospitals.

AJ, Xtender and Vario families have been extensively used in rural electrification programs and they are still today a reference for their reliability and robustness, ensuring the maximum system and battery lifetimes.

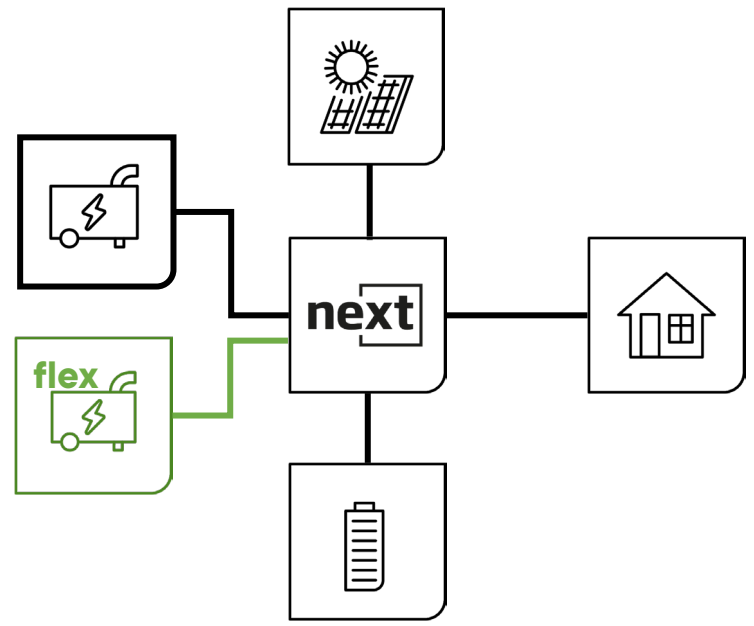

Hybrid systems

Use of a genset allows to complement the energy needs in offgrid systems in case of bad weather or high demand. Xtender is able to generate single phase or three phased system up to 72kVA. The Next3s is an all in one revolutionary solar hybrid inverter designed to cover all the cases we met in 35 years of experience. 3 Next3s can make systems up to 45kW.



Hybrid systems for a school in Malaysia



The energy access solution of Studer-Innotec was awarded with the Solar Impulse label for efficient solutions. Compared to the traditional use of diesel genset, the hybrid systems allows for a great reduction of fuel use and then reduction of CO2 emission.

**System Design:
Flexibility is a key point of
our products, ask us we
have the solution**




Pico-hydro turbines working with VS and Xtender in Nepal

AC-coupling

The AC-coupling is the principle of using separated battery inverters and PV inverters in the same system. The different elements are connected via the AC lines and therefore the name AC-coupling.

In island mode, the battery inverter (the Next3s/Xtender) creates the voltage/frequency of the local grid and the solar grid inverters synchronize and connect to that local grid as if they were on the normal grid. In this kind of system, the solar production is directly consumed by the AC loads. With a connection of the PV-inverter to the AC-flex of the Next3, this production is fully measured and monitored by the Studer system.

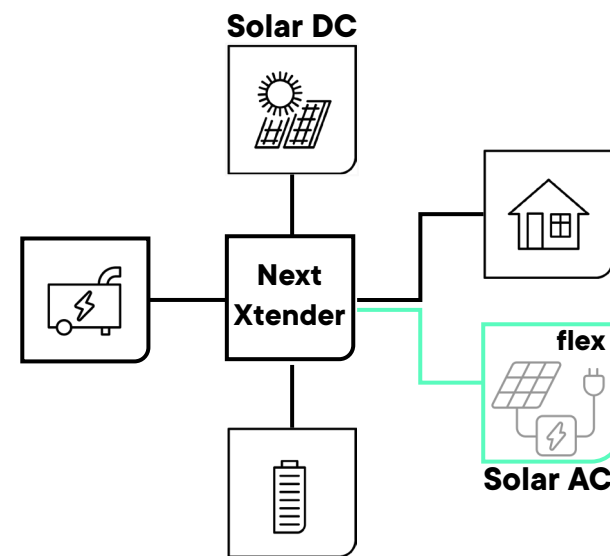


DC+AC-coupling system in South America




DC-coupling with multiple sources

Various sources can be easily integrated into the common point of the battery. Variostring has a wide input range for voltage and has been working with various AC generators (synchronous, asynchronous self-excited + rectifier).

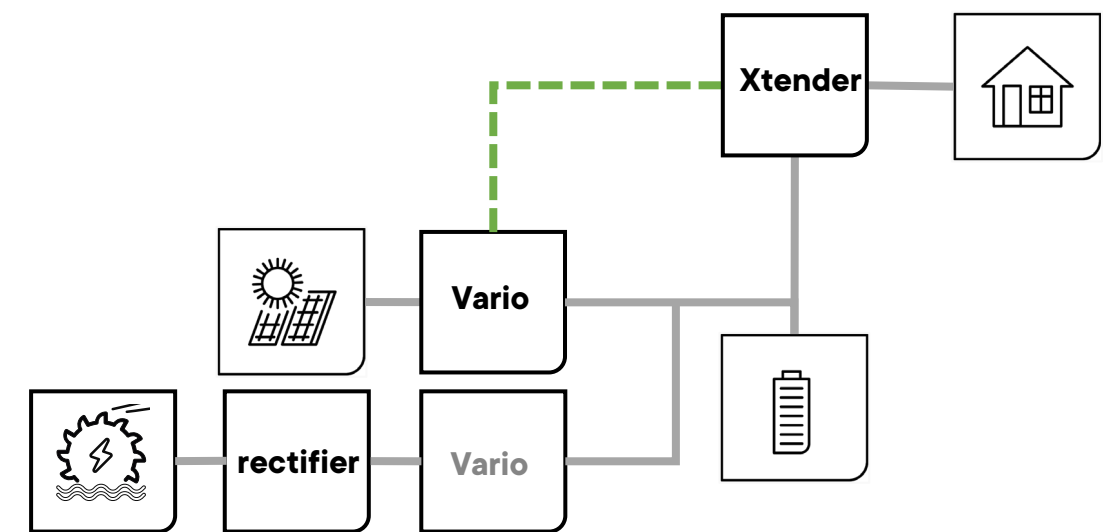


Minigrid for rural electrification

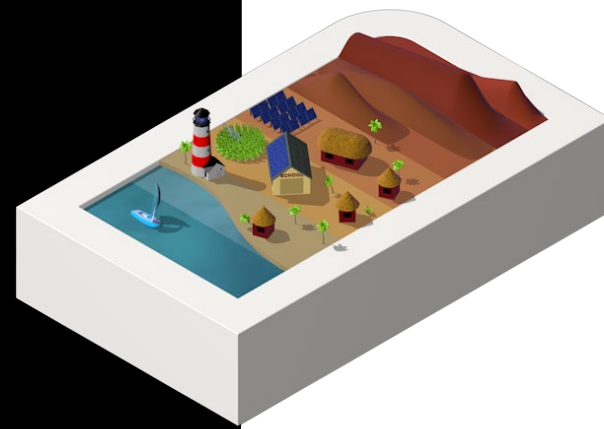

A minigrid is a small island grid working locally. A centralized energy system creates the grid, and a distribution system reaches the consumers. Studer Innotec developed a series of functionalities to be the centralized system or be distributed interactive systems coupled by AC.

Central system

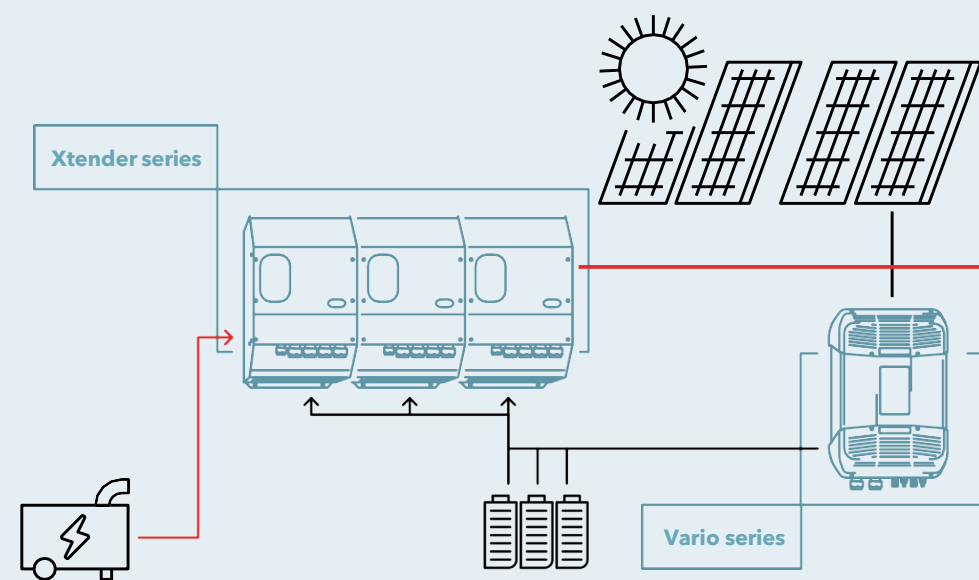

Diesel generator / Mains

AC sources like diesel generators can recharge the batteries during weak renewable production time or peak power consumption in the Minigrid to secure the system. Automatic handling of the Start and Stop by the central **Xtender**.

The system may be connected to a future public grid by this point.


Battery

The advanced battery management system of the **Xtender** and **Vario series** allows to use most types of battery technologies like: AGM, Gel, Flooded Lead-acid, NiCad, NiFe, Redox Flow or Lithium.

Monitoring

Different types of monitoring are possible:

- **RCC 02/03** remote control unit focal on-site monitoring including datalogging and programming.
- **Xcom LAN/GSM** for monitoring and datalogging with internet access.
- **Xcom 232i /CAN** for a communication with an external monitoring device.

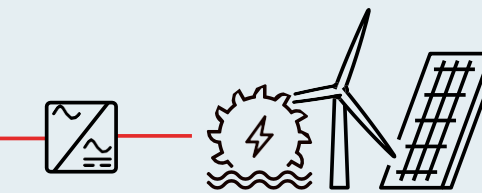



Grid feeding

Producer of renewable energy feeding back to the minigrid. Most of grid-tied inverter brands are compatible for this application.

DC Coupling

Back-up system which includes a local solar production. This configuration allows to use in priority the own produced solar energy and to minimize the grid consumption.

The **Xtender** is automatically managing the energy flow to use a maximum of the local produced solar energy by the **Variotrack** or **Variostring**.

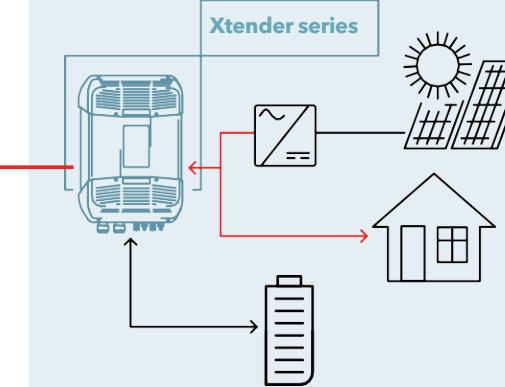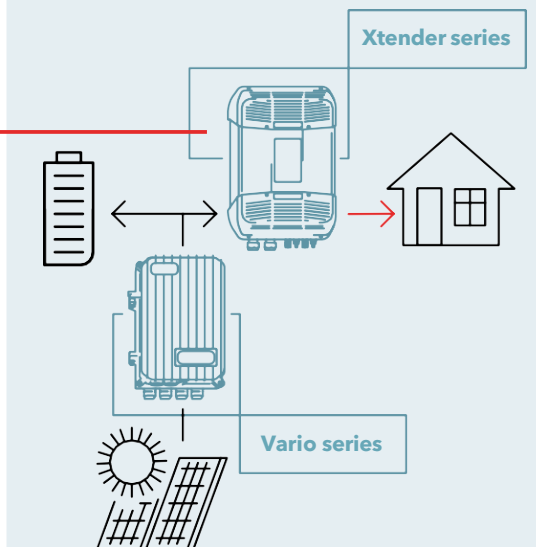


AC Coupling

Local production of solar energy by a grid-tied inverter. This configuration includes a backup function and the solar overproduction is fed back to the minigrid.


The **Xtender** is able to control the grid-tied inverter by frequency shifting and thereby manage the battery charge.

Loads



Direct energy consumers of the minigrid, like small households or communal consumers (eg. Streetlights). Typical pay-as-you-go consumer with different tariff scales. Different tariff schemes and management models can be implemented.

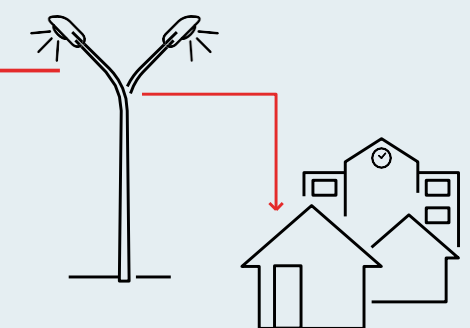

Mobile applications

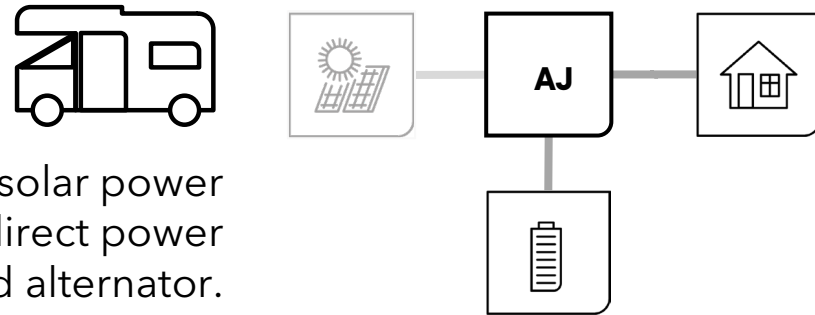

Caravanning with solar power from the roof or direct power from the battery and alternator.

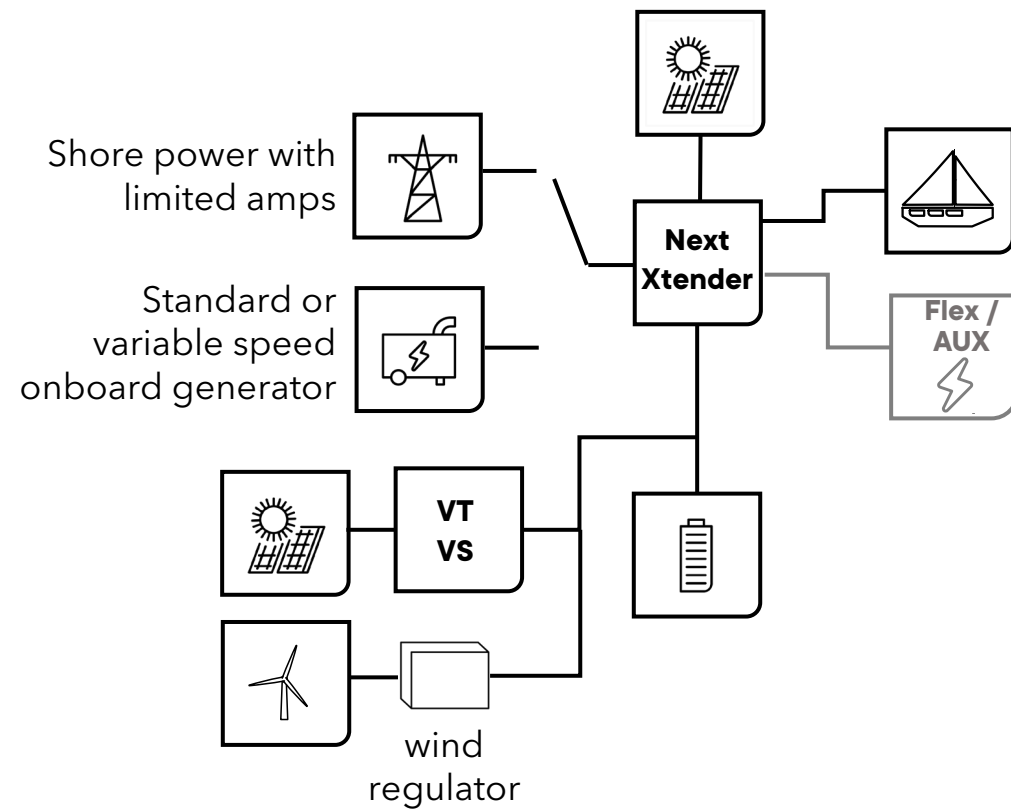

Silent onboard power from batteries for boats. When connected to the pier with limited shore connection the Smart Boost adds power from the battery to supply the loads.



High altitude world record expedition

DPP innovation with its off-road vehicle powered by our vt65 has set a world record in December 2023 for an electrical vehicle by climbing at 6510 meters above sea level in Chile at the Ojos de Salado.

The vehicle incorporates 5 solar charge controllers vt65. We were in contact with the development team during the design of the electric system.







Ongrid applications

The offgrid model to maximize autonomy for grid-tied systems

16kW, 100% offgrid -100% ongrid, why?


The Next3s is a three phased 16kW. It can cope with all the loads of a house at the same time, including an 12kW EV charger. In case of blackout the house can continue to be fully powered in offgrid mode without compromise. AC flex output allows for energy management with loads.

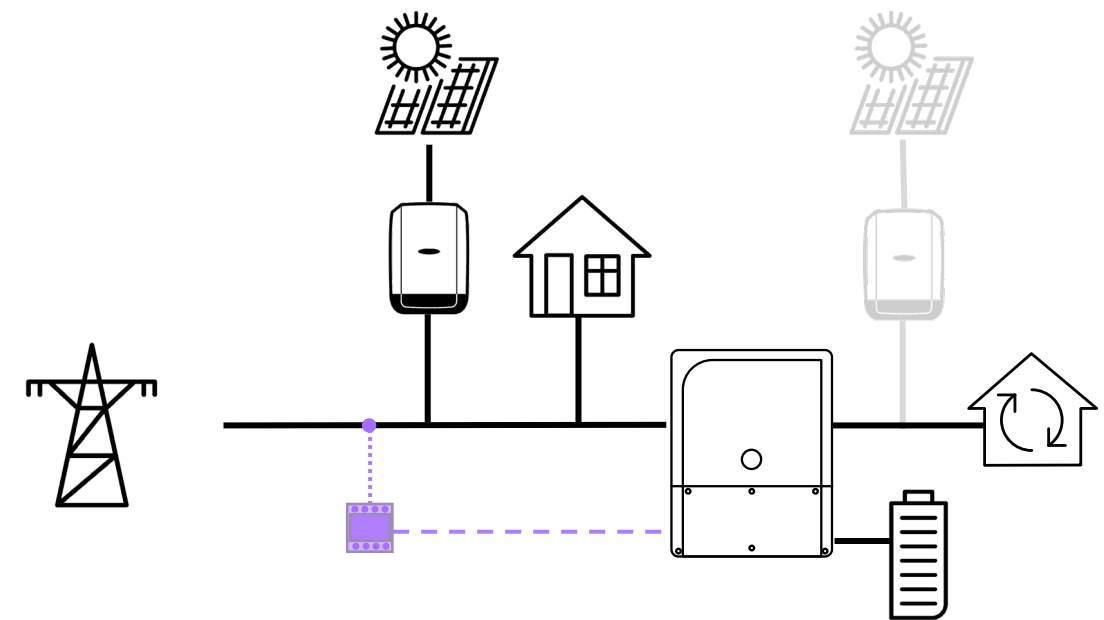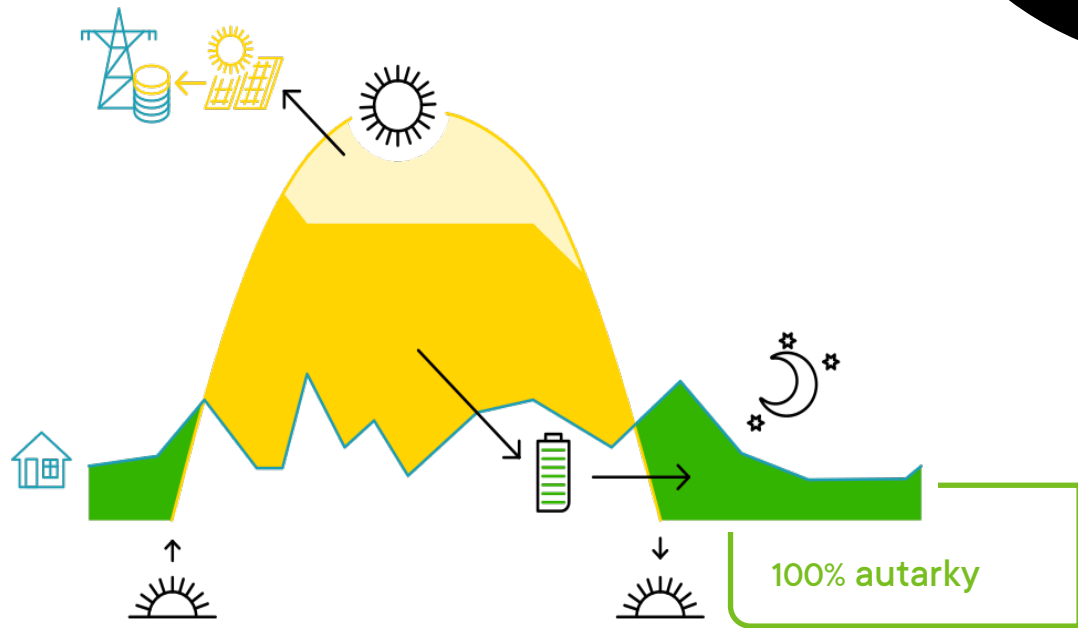

Self-sufficiency


A new approach for solar installations

More than self-consumption, we propose self-sufficiency: storage of solar energy during the day, supply of loads with your energy during the night, operation in case of grid failure. A step towards energy autarky. Install a Next3s at the input of your house and it manages it all.

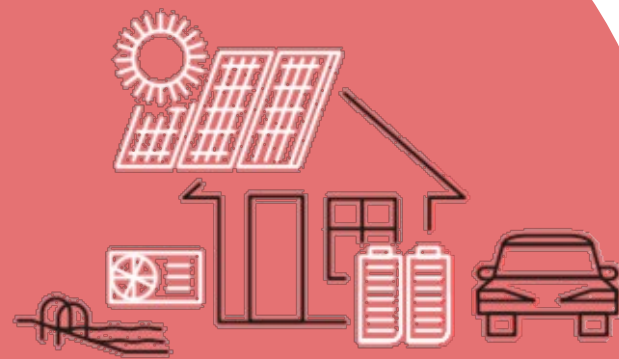

Retrofit

Adding storage on existing grid feeding systems

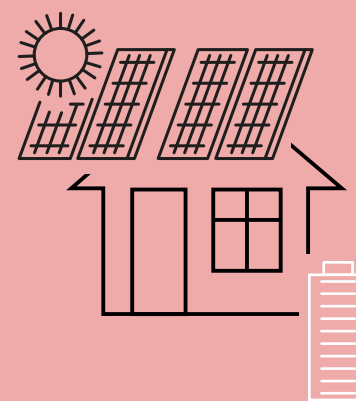

The Next1 can be added very simply to a system with a power meter measurement on the building introduction. A single-phase the grid inverter can be connected directly on the AC flex port and work in case of grid failure. The Next3s allows for extension with more solar and storage. It can work with any modern inverter in an AC-coupling scheme. It is placed at the input of the house, manage all the power fluxes.

Special ongrid applications



Smart Energy Management


Develop your own product: you can design your control of the system with the unique opportunity to take full control of the storage. This is enabled with open communication with MODBUS TCP and RTU.

Compatible with existing energy management systems (EMS) like Solar Manager.




Bypass box


An automatic bypass for servicing the inverter is available in option. Add redundancy to your system!

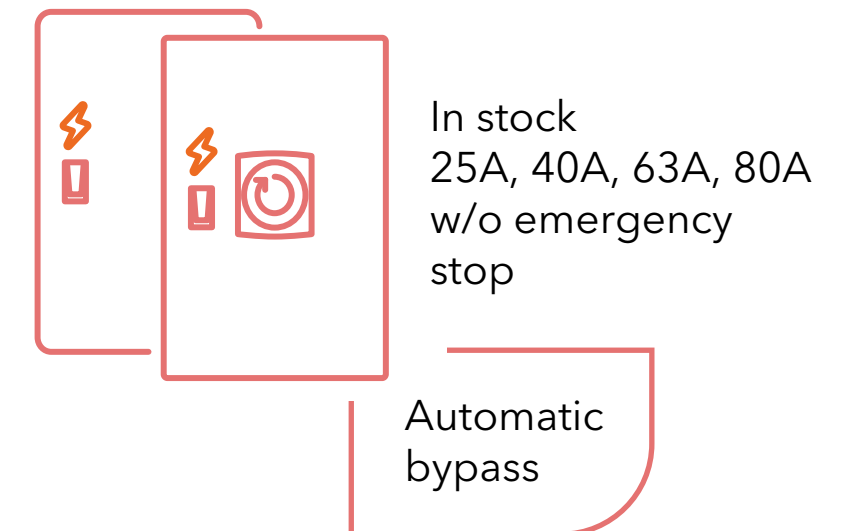

Advanced monitoring

Beyond the nice-looking designs for end customers, our monitoring portal is made for professionals... But yes, we also have the nice looking and simple Easy Monitoring APP for the end user.

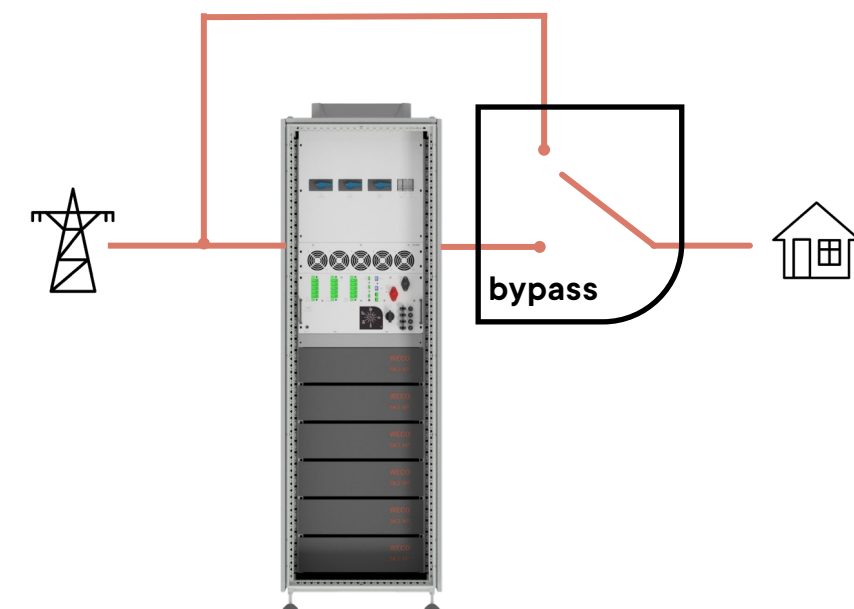





Grid backup

Stay powered with unreliable grids. Solar and batteries give you security.

Kerala is well known for its lush vegetation. It has a wet and maritime tropical climate, influenced by the seasonal heavy rains. During this monsoon period, power failures due to trees falling is common in rural areas. In 2018, monsoon caused floods in Kerala and power failure in most of the rural parts for more than 3 days.

Grid services


Flexibility is one key point of our product: ask us we have the solution

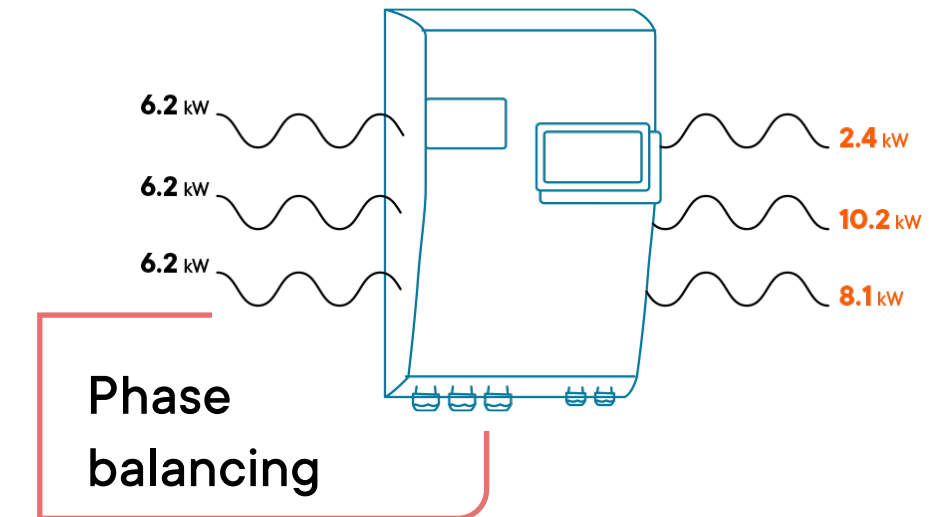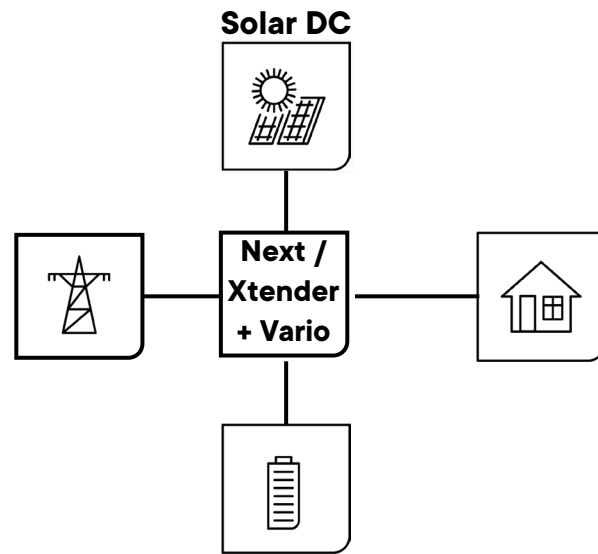

Solar backup in Kerala, India

The grid can be present but with limited capacity and quality. Our inverter charger can perform:

- **Peak-shaving:** peak power can be compensated automatically by the battery. That allows per example to override the grid connection limitation
- **Quality survey :** the installation can automatically disconnect if the quality is poor
- **Single to three phased supply:** two phases created by the inverters to supply three phased loads (motors)
- **Phase balancing:** limit actively the unbalance and even transfer power from one phase to the other
- **Zero feed-in:** zero grid feeding means that no energy is fed into the power grid. Solar is used for the load and excess goes to the storage, never to the grid
- **Load shifting:** with changing electricity prices during the day, storage allows for a bill optimization. That is good for the economics and for the grid



Grid booster

Stabilize grid with only storage solution (end of line or high renewables penetration)

Next3s rack: integration example

Infra: a complete energy infrastructure in a cabinet




All-in-one plug-and-play energy solution
Next3s rack, smart energy management
Up to 30kWh of energy storage
Up to 24kW built-in solar power with 2 MPPT
Optional bypass, infra outdoor, infra battery



More information

studer-innotec.com/infra

Page product including technical specifications.

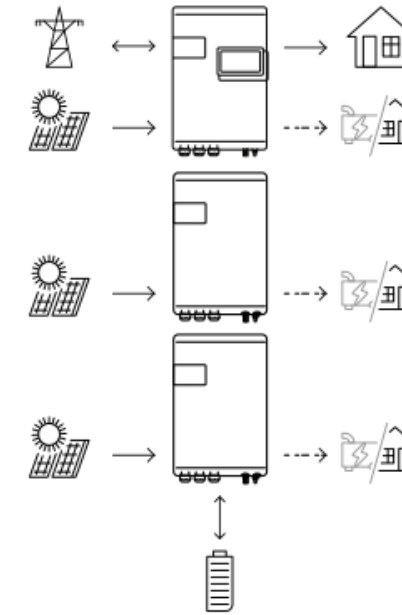

Common battery



Next3s multi-unit systems

Up to 3x nx3 in parallel (48 kW)
1 internal transfer 80A (55kVA), 1nx interface
Separate solar inputs, AC flex, Common AC source, AC loads
Batteries can be separated, possibility to use different technologies and different sizes


Customers talk about Next3s!

FTT - Offgrid
203 abonnés
10 mois

Po 3 týždňoch sme sa vrátili k tejto inštalácii, aby sme ju doplnili o wallbox k EV KIA EV6 a on-grid menič Huawei SUN2000 M1 3KTL, ktorý je pripojený k Studer Innotec NEXT3 na vstup AC ...voir plus

INNOVENTUM
1 mil seguidores
5 meses


Autarky can be defined as the quality of being self-sufficient. Thus energy-autarkic habitats are human dwellings that are independent concerning energy consumption for living. This may be based on resource efficiency, ch ...ver más

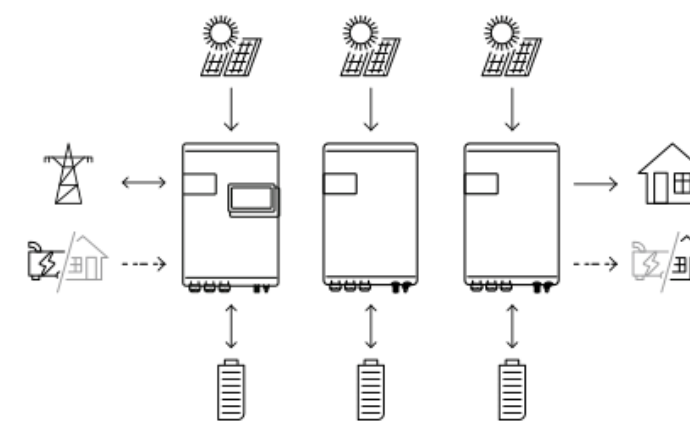


Multi-battery



Interfaces in multiple languages

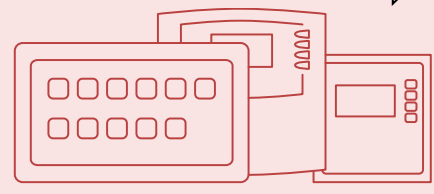

On-site

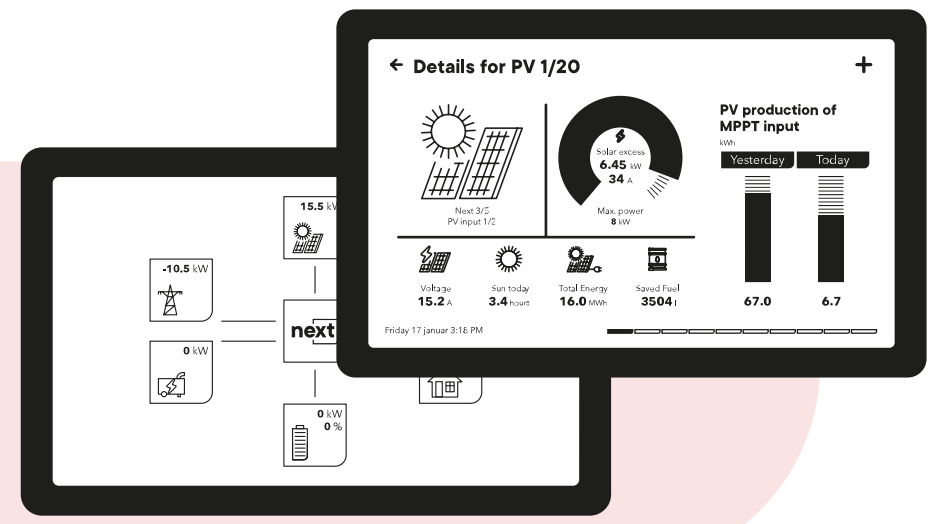


Monitoring and remote control tools


Today, monitoring a renewable energy system is essential. Our tools provide continuous information (real-time and past behaviour) for a deep understanding of the operation of the system.

Keep an eye on the system

Mobile



Professional

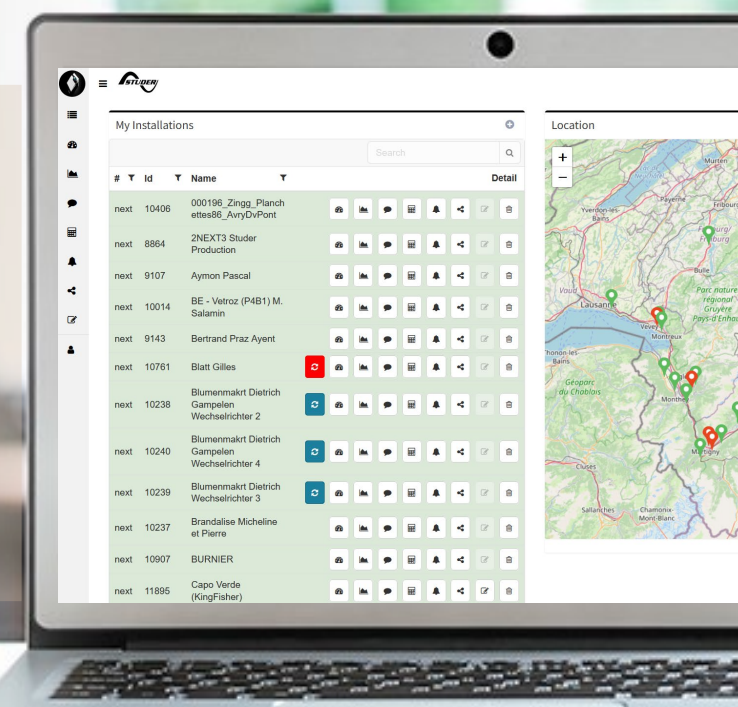


Installation supervision

Tools adapted to all

From comprehensive indicators for the end user to technical details and remote settings management for the professionals, we carefully design our different tools to cope with the different needs of our customers and their end-customers.




Where does my energy come from? 71% autarky.



○ Solar ○ Grid/genset

Where does my solar production go? 37.2% self consumption.



○ Solar direct use ○ Solar to grid

Energy over the entire period

02/04/2024 - 02/04/2024
1 day(s), 0 missing

Grid/genset consumed [kWh]

5.33

Grid feeding [kWh]


31.69

Consumption [kWh]

18.41

Solar [kWh]


49.68

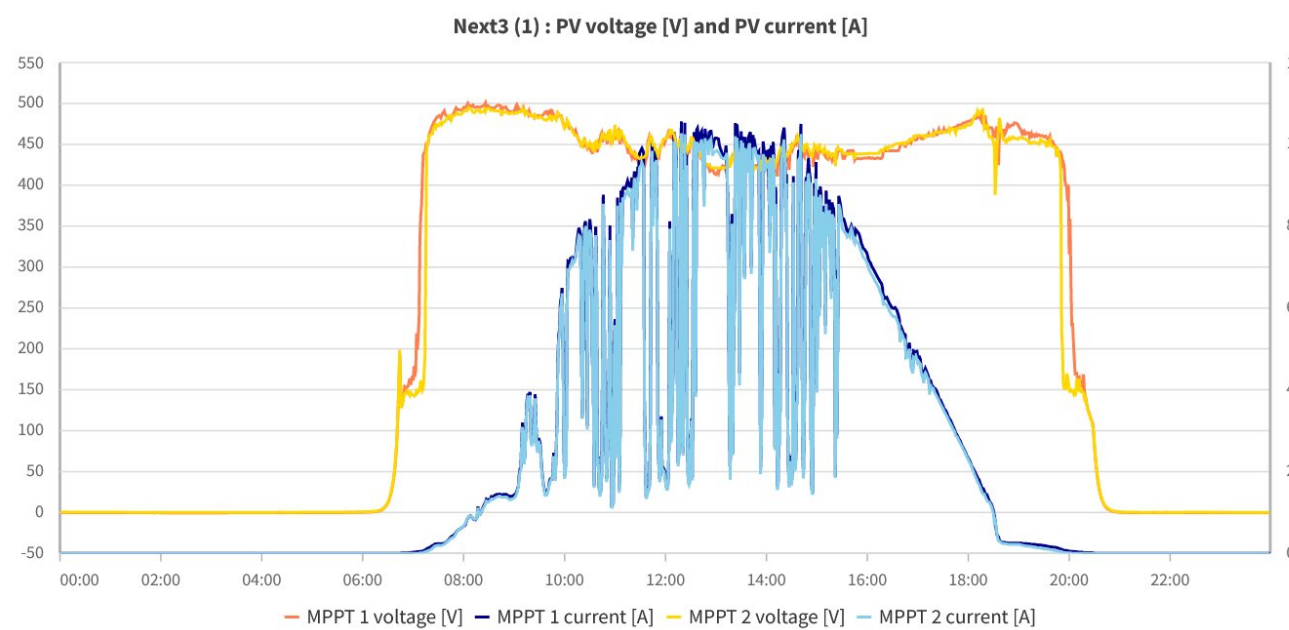

On top of our monitoring tools that are available with our devices, we keep a very open communication philosophy. Using our communication bridges every professional can integrate Studer devices (with full control and information) into an advanced monitoring system.

Open data

- Readable csv files with all datas on SD (Xtender/Vario/RCC) or USB stick (next)
- Source data available on web portal
- Web API to access data
- Libraries and examples on GitHub





Open protocols for SCADA

- Xtender range: Studer serial RS232 protocol, Studer CAN public protocol, Studer Modbus RTU public protocol
- next range: Studer Modbus RTU & TCP/IP public protocols

Worldwide network

Present in more than 150 countries with a 120+ network of Studer partners

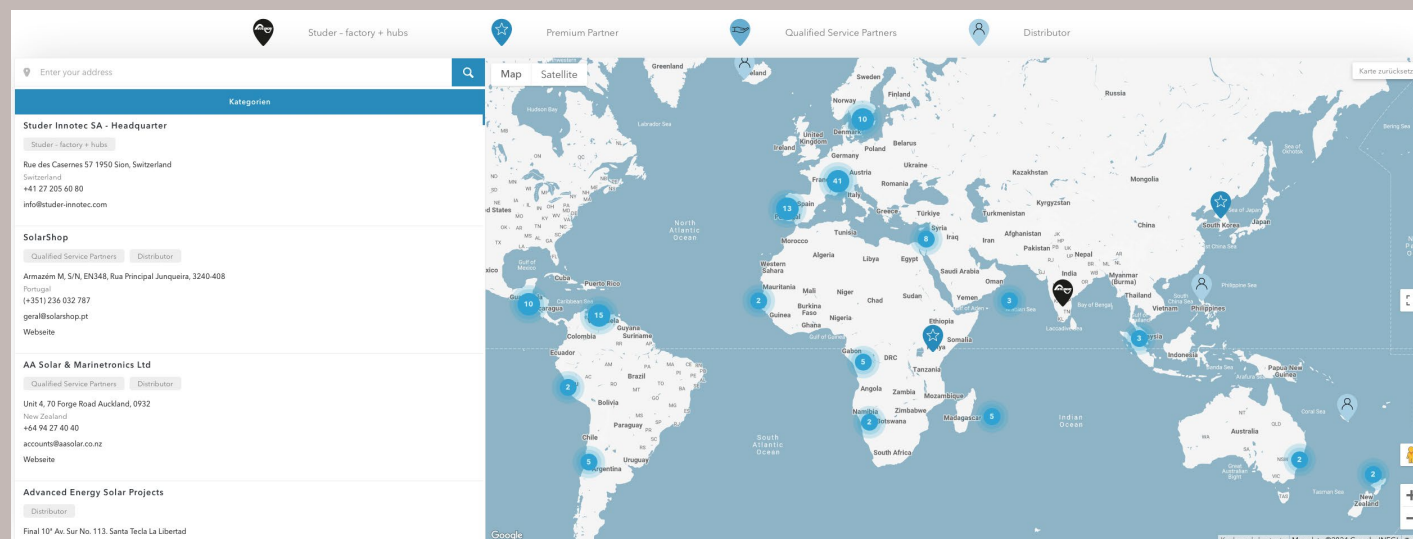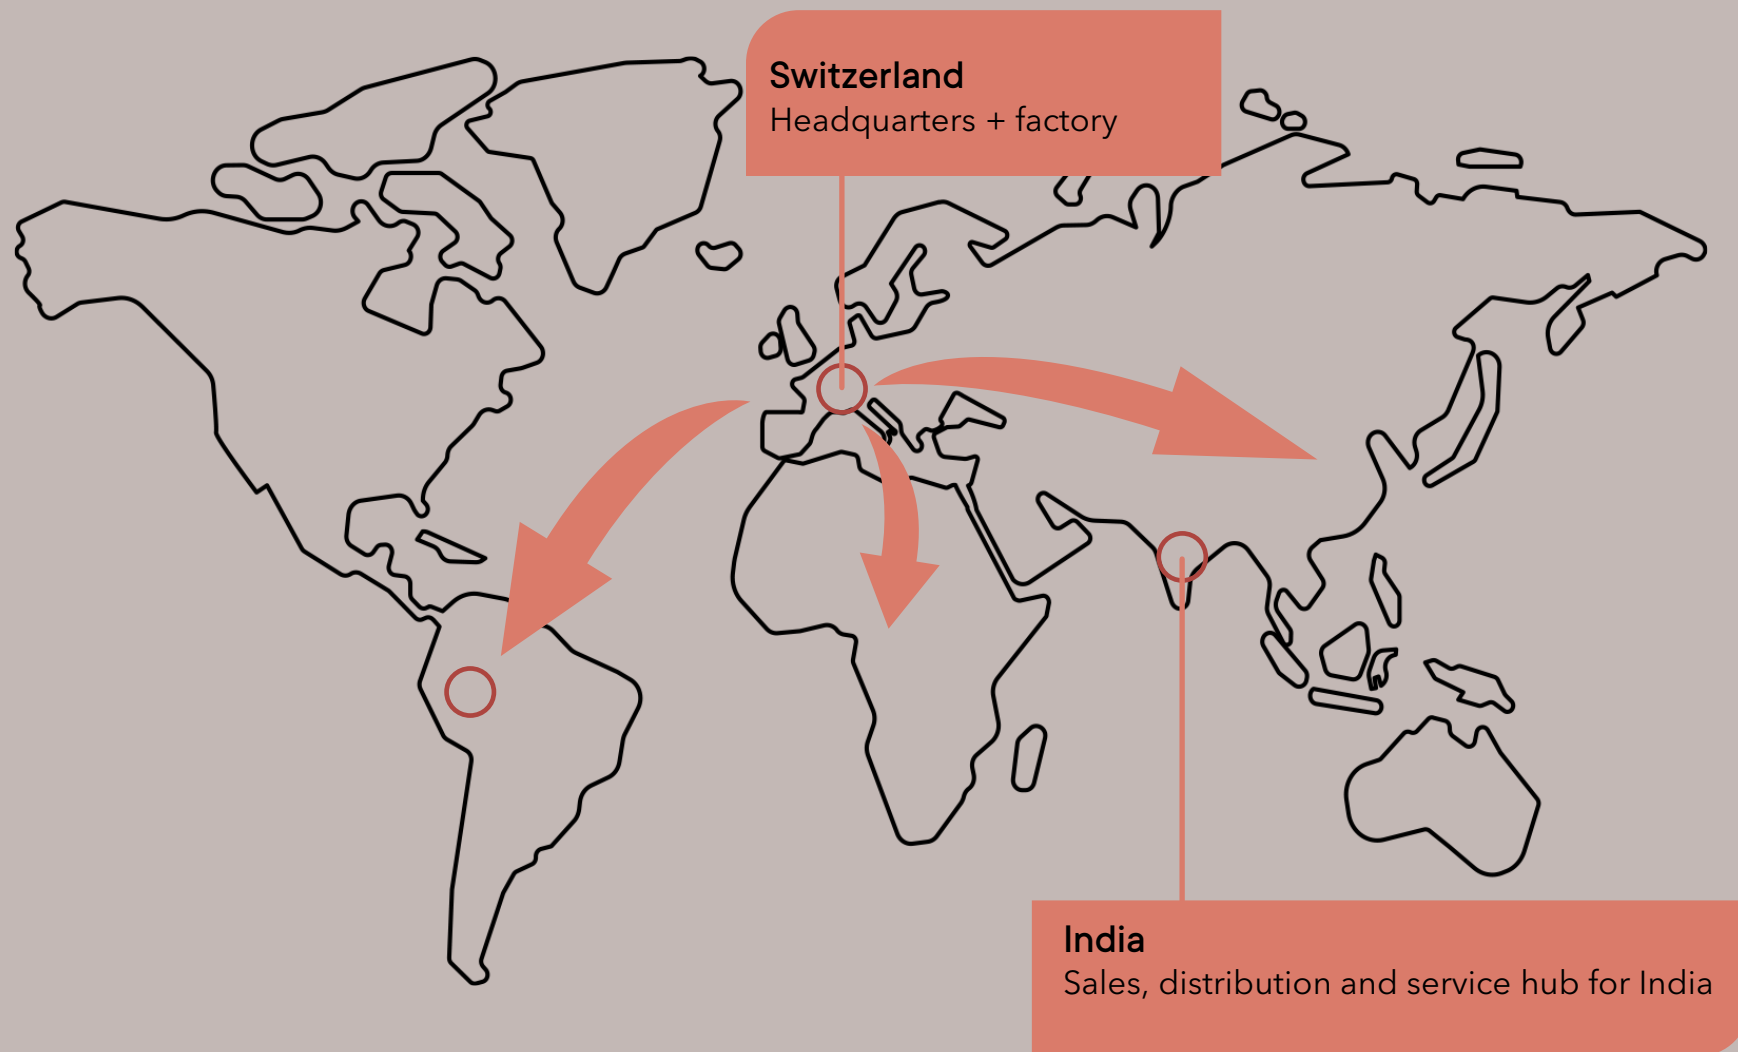

Check our partners map
studer-innotec.com/partners/



Contact us to be part of it...

Compatibility

Studer is committed to continuously extend its products compatibility in order to facilitate the professional integrations of our products into solutions. Check with our team

Batteries



and more...

Energy Management System EMS



and more...

Solar inverters



and more...


Support at your service

Dedicated technical service

Our dedicated technical support team assists our professional partners in every aspect related to the pre- and after-sales, trainings and factory visits.




A human contact with specialist in 4 languages. Regular technical formations performed to enhance your knowledge and master energy systems with our products.




After sales: Studer care

Swiss made power guarantees a high reliability. Studer products will benefit not only from the longest warranty period of the market (10-year) but also from additional services to keep your mind at peace.




Resources



Tech support website with FAQs:
<https://support.studer-innotec.com>




Meet us: trainings, webinars and expos:
<https://studer-innotec.com/expos/>






Download all devices manual and datasheets:
<https://studer-innotec.com/downloads/>

Next3s

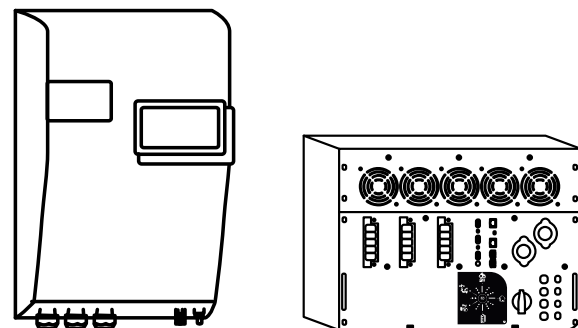

Technical specifications

The Next3s all-in-one smart inverter charger is a 3-phase 16kW inverter with 2 MPPT inputs of 8kW each. There are two versions: wall-mounted and rack. It can be paralleled up to 3 units for 45kW systems

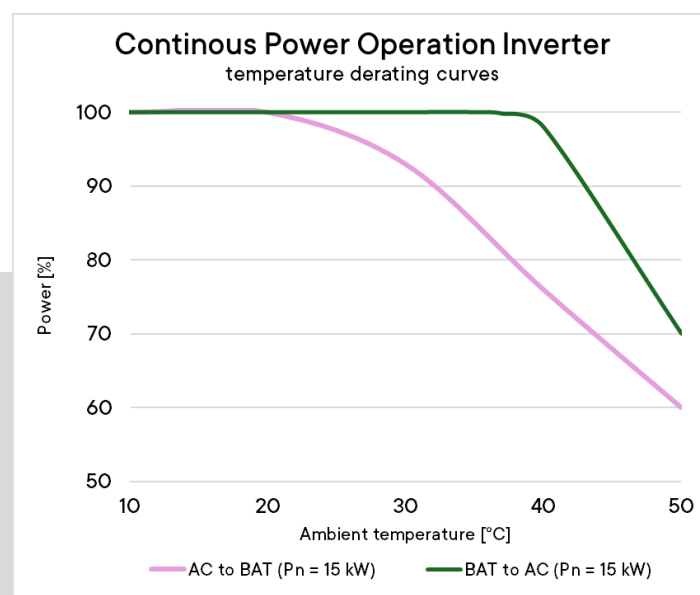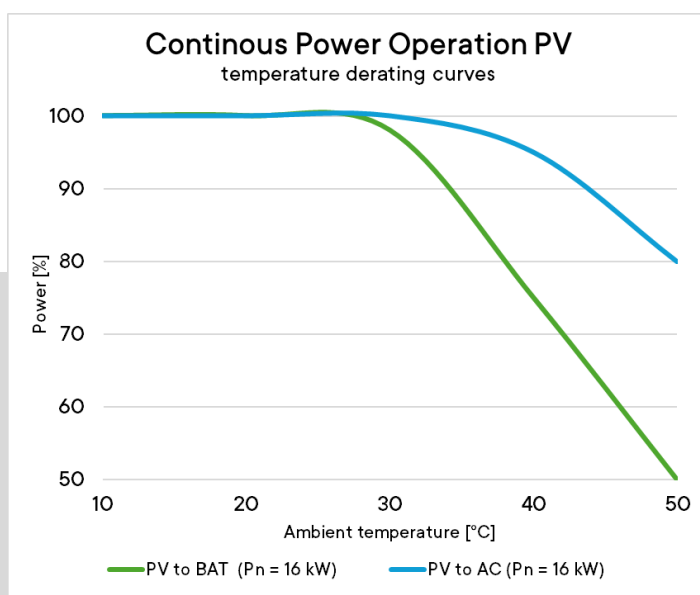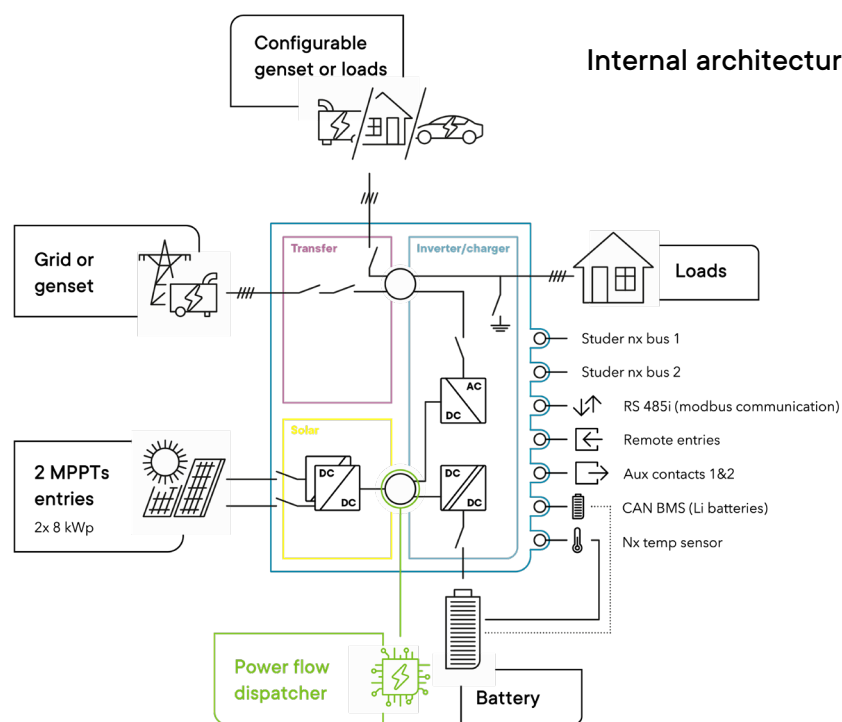

nx3 16000-48 / nx3 16000-48-rack

Inverter + battery charger

Continuous power 25°C	15000 VA
Power 30 min. 25°C	16000 VA
Power 5 sec. 25°C with solar / inverter / 1-phase	30000 / 24000 / 10000 VA
Nominal output voltage, line to neutral	pure sine wave 220/230/240 Vac (1%)
Nominal output voltage, line to line	pure sine wave 380/400/415
Nominal output frequency	50/60 Hz (0.02%)
Nominal battery voltage (input range)	48Vdc (36-68 Vdc)
Maximum charging current / power	300 Adc/ 15000 W.

Solar PV

Number of MPPT inputs	2
Max PV short circuit current per PV input	27 Adc
Maximum PV open voltage (Voc)	900 Vdc
Start-up voltage / Shut off voltage	200 / 100 Vdc
Maximum solar power produced (electronic limitation)	2x8000W
Maximum solar power recommended (@STC)	2x12000W
MPP voltage range recommended	300 - 700 Vdc

AC source (grid or genset)

Maximum rated current	3*80 Aac
Operating voltage range, line to neutral	176 - 288 Vac
Nominal voltage, line to neutral / line to line	220 - 230 - 240/ 380 - 400 - 415 Vac
Nominal frequency	50/60 Hz

Overvoltage category (OVC), grid code compliance

EU Commission Regulation 2016/631 (NC RfG), EN 50549-1:2019, VDE-ARN 4105:2018, IEC 62116, IEC 61727

AC flex (source or load)

Maximum rated current	3x80 Aac
Operating voltage range, line to neutral	176 - 288 Vac
Nominal voltage, line to neutral / line to line	220-230-240/380 - 400 - 415 Vac
Nominal frequency	50/60 Hz
Maximum output current	3x102Aac


General data

Product dimensions h/w/l and weight	wall-mounted : 320 / 450 / 760 mm 58 kg rack 19": 350 (8u) / 485 / 675 mm 58 kg
Transport dimensions h/w/l and weight	600 / 800 / 720 mm 72 kg
Selfconsumption OFF / Standby / ON	6 / 7 / 41 W (+5 W with nx interface)
I/O Communications	2 x nx communication bus RJ45/8, 1 x CAN BMS, 1 x R5485i (Modbus), 1 x nx tempSensor
Multifunction I/O contacts	2x Input, 2x Output, rating 16 A each
Interfaces	nx interface, datalogger USB 1-min resolution, 1x RS4851, 1x CANi, 1x LAN, 4x USB, nx wifidongle, studer portal +easy monitoring APP

Safety+EMC conformity (CE marketing)



Low Voltage Directive (LVD) 2014/35/EU, EU Electromagnetic Compliance (EMC) 2014/30/EU

Next1

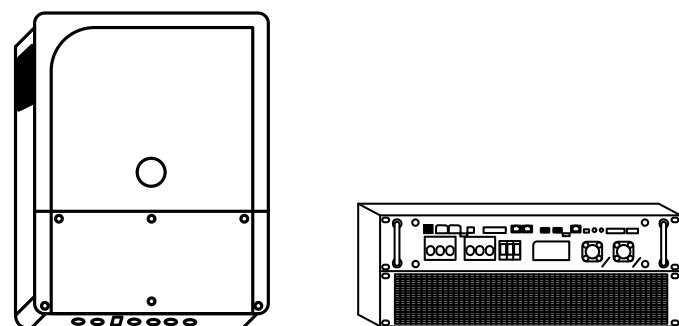

Technical specifications

The Next1 is proposed in 2 voltages models for 24 and 48Vdc. Each is available in 230Vac and 120Vac (-US), in wall mounted or rack 19" versions.

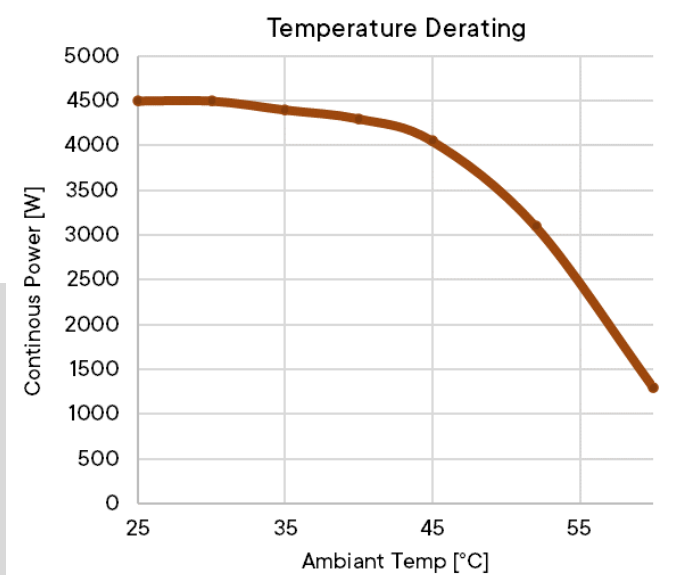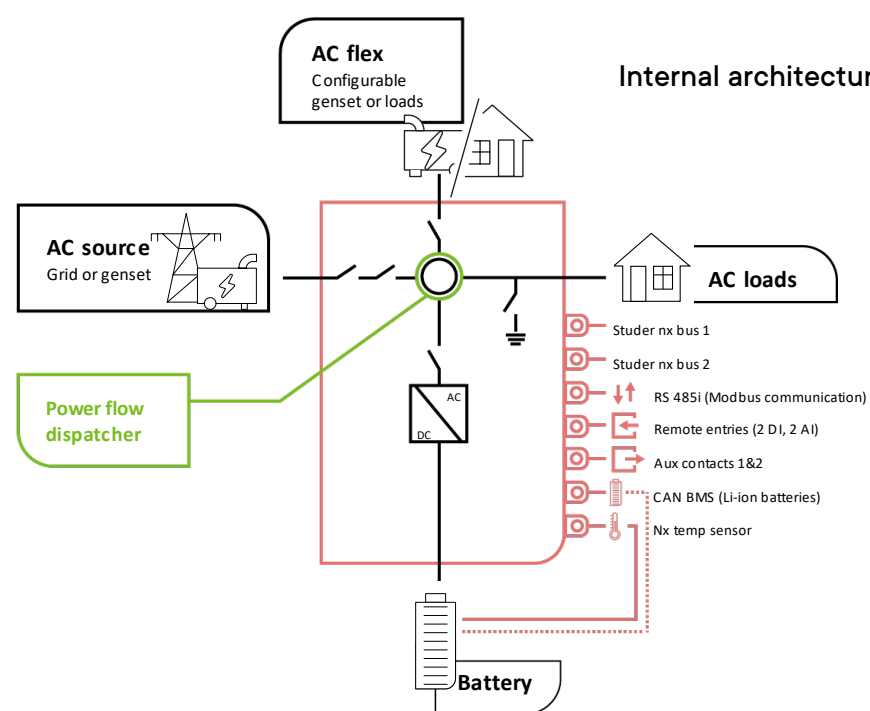

nx1 6500-48 continuous power
Outstanding behavior up to 45°C

nx1 6500-48 (-rack) **nx1 5000-24 (-rack)**
(coming 2025)

Inverter + battery charger

Continuous power 25°C	4500 VA	3500 VA
Power 30 min. 25°C	6500 VA	5000 VA
Power 10 sec. 25°C	12000 VA	NYA
Nominal output voltage, line to neutral	pure sine wave 220/230/240 Vac (±1%)	
Nominal output frequency	50/60 Hz (±0.02%)	

Battery charger

Nominal battery voltage (input range)	48Vdc	24 Vdc
Battery input range	38-68 Vdc	19-36 Vdc
Maximum charging current / power	125 Adc/ 6250 W	NYA

AC source (grid or genset)

Maximum rated current	70 Aac
Operating voltage range, line to neutral	176 - 288 Vac
Nominal voltage, line to neutral	220 - 230 - 240 Vac
Nominal frequency	50/60 Hz
Overvoltage category (OVC)	III

Grid code compliance: EU Commission Regulation 2016/631 (NC RfG), EN 50549-1:2019, VDE-ARN 4105:2018, IEC 62116, IEC 61727


AC flex (source or load)

Maximum rated current	40 Aac
Operating voltage range, line to neutral	176 - 288 Vac
Nominal voltage, line to neutral	220-230-240 Vac
Nominal frequency	50/60 Hz

General data

Product dimensions h/w/l and weight	wall-mounted : 182 / 439 / 580 mm 35 kg rack 19": 175 (3u) / 420 / 550 mm 35 kg
Transport dimensions h/w/l and weight	NYA
Multi units systems	3 units in parallel, three phased, split phase
Self-consumption OFF / Standby / ON	3 / 7 / 20 W
I/O Communications	2x nx communication bus RJ45/8, 1x CAN BMS, 1x R5485i, 1x nx tempSensor
Multifunction I/O contacts	2x digital inputs, 2x analogical inputs, 2x Aux Output rated 16A each
Interfaces	2x USB (datalogger USB 1-min resolution), 1x LAN (Ethernet, Modbus TCP, studer portal +easy monitoring APP), nx wifidongle, nx-interface with screen in option
Safety+EMC conformity (CE marketing)	Low Voltage Directive (LVD) 2014/35/EU, EU Electromagnetic Compliance (EMC) 2014/30/EU
Ingress protection IEC60529	IP65

Xtender

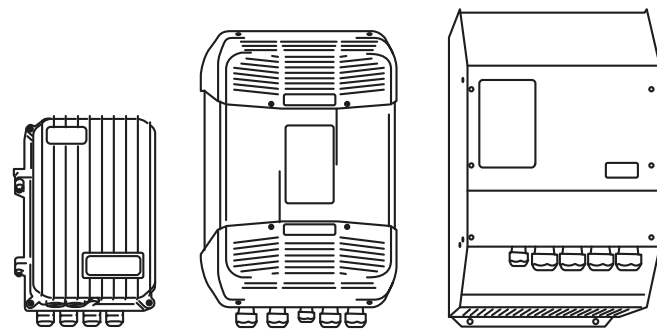

Technical specifications



The Xtender range is divided into 3 sizes: High power XTH, Medium XTM and Small XTS. Each type has the 3 battery voltages of 12, 24, and 48 Vdc. Most of the models are available in 230Vac and 120Vac. It works as an ecosystem with multiple Xtender, Vario chargers and accessories for battery and communication.

Systems with multi-units and


Multiple Xtender, 9 units 3-phases x 3 //: up to 72kVA systems

Multiple Variotrack, 15 units: up to 75kW of solar


Multiple Variostring, 15 units: up to 105 kW of solar

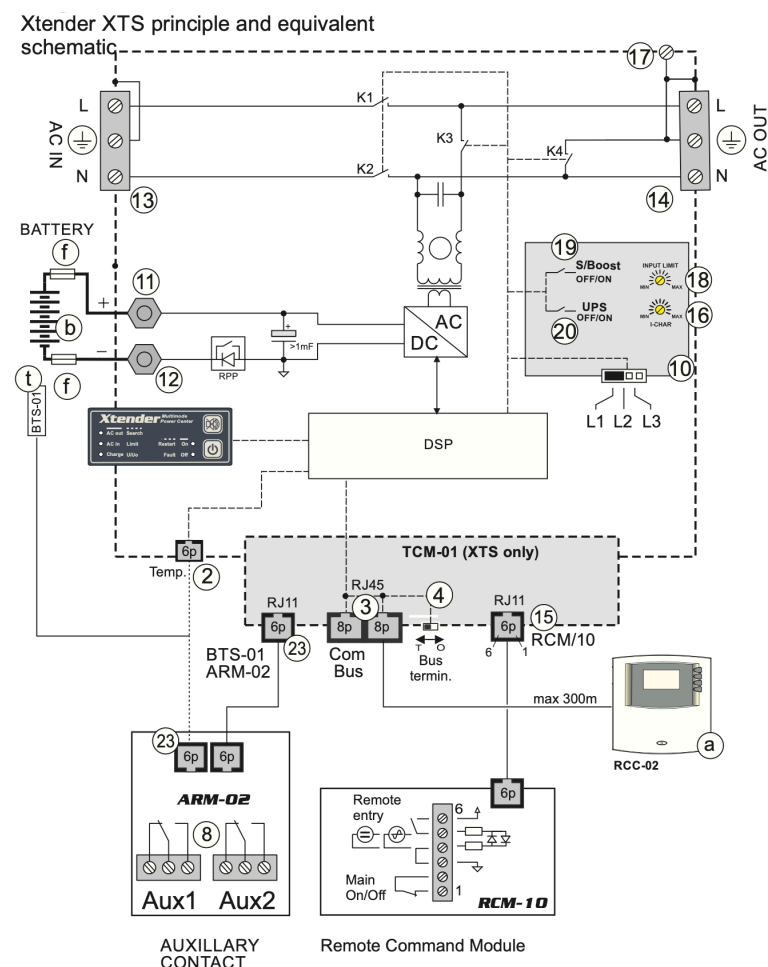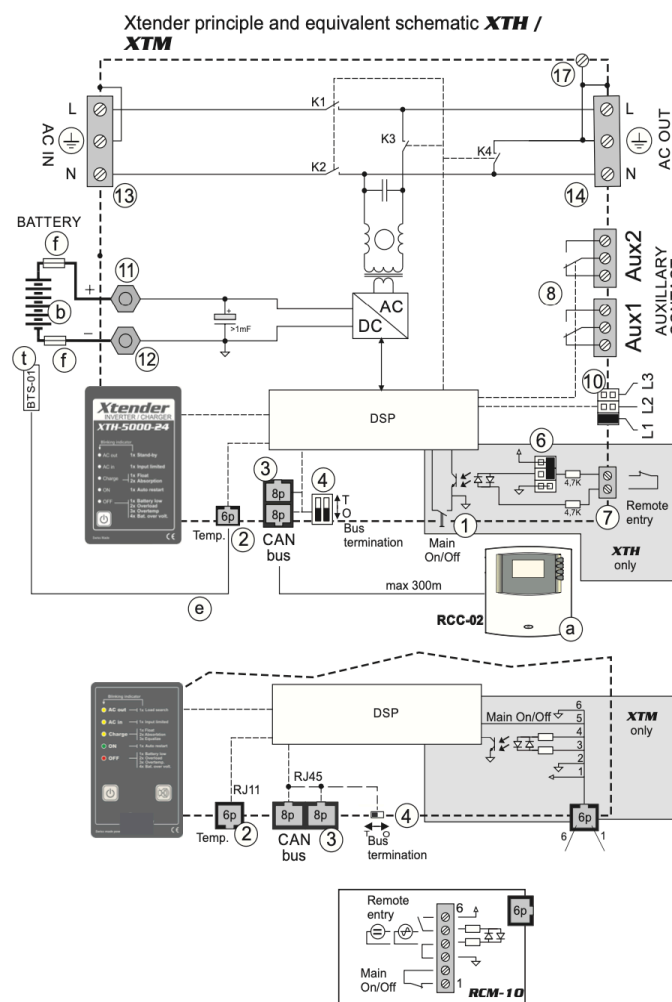


Efficiency curve for Xtender XTS series inverter - charger

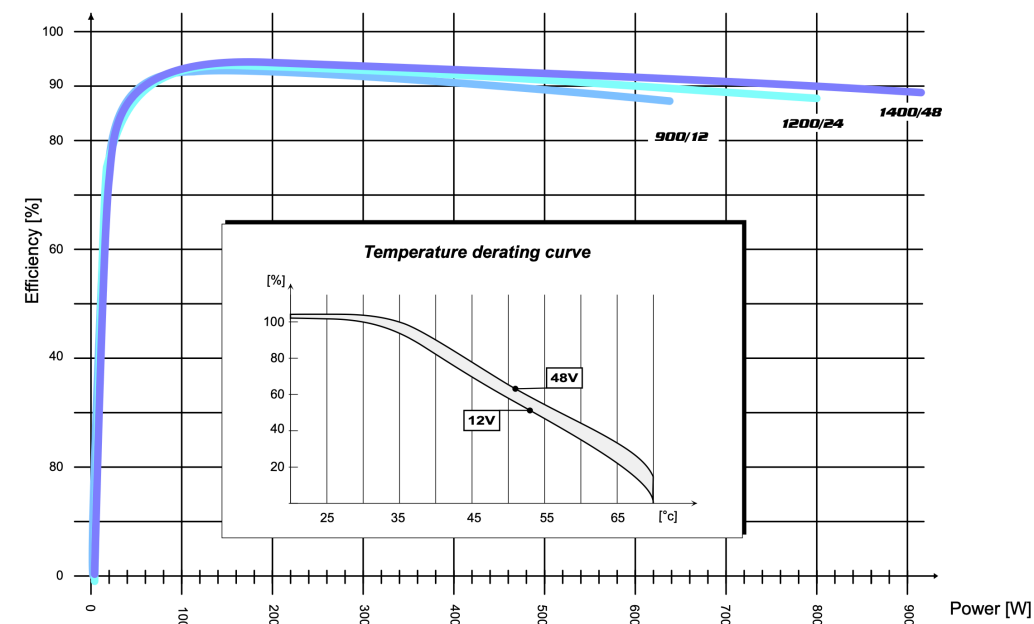

Power vs Efficiency for Xtender XTM series inverter - charger

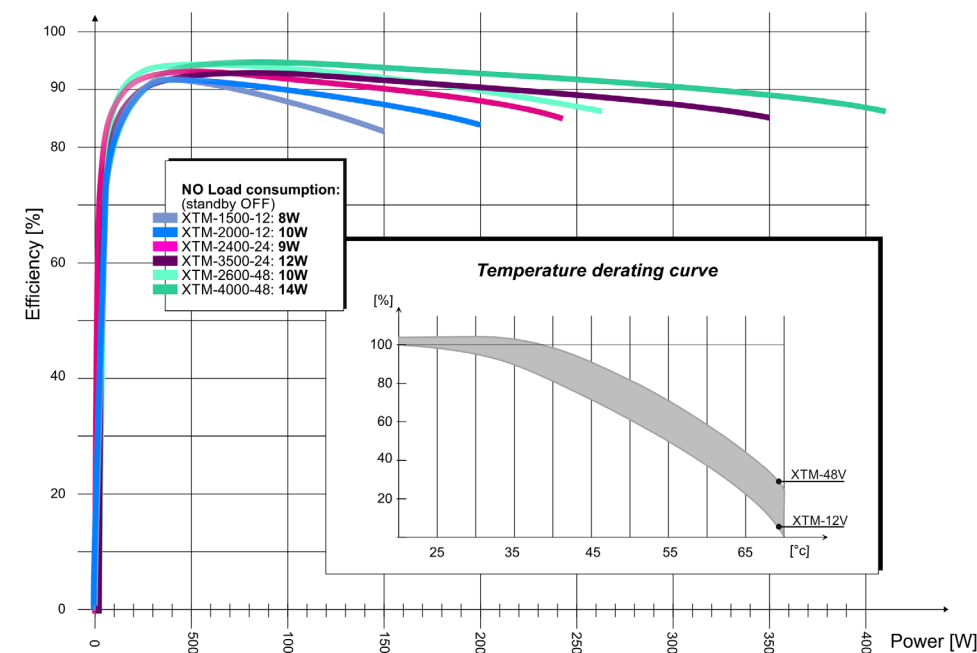

Power vs Efficiency for Xtender XTH series inverter - charger

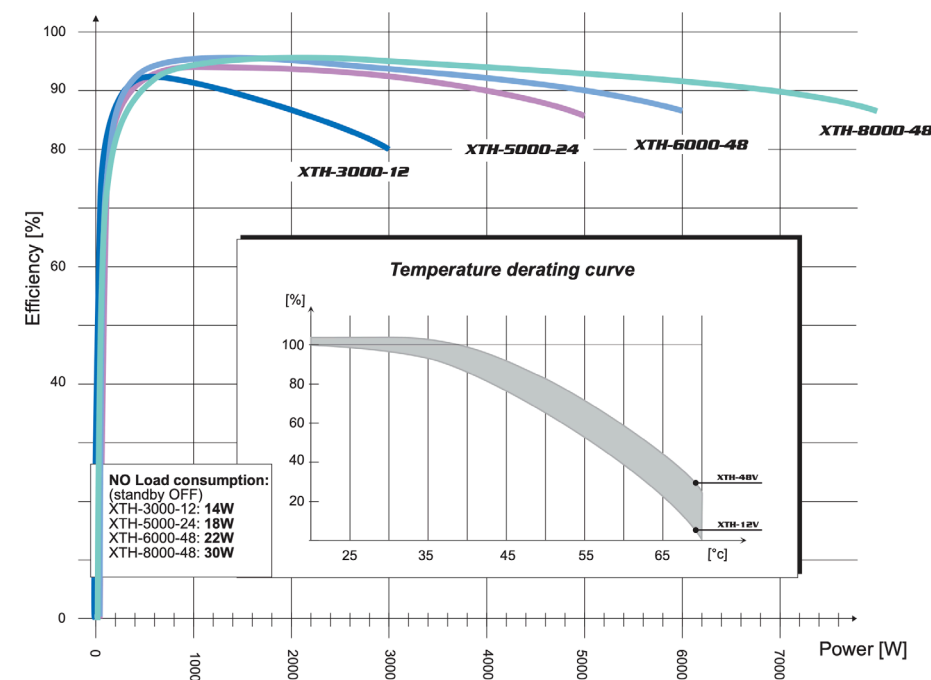

Inverter

Nominal battery voltage	12 Vdc	24 Vdc	48 Vdc	12 Vdc	12 Vdc	24 Vdc	48 Vdc	24 Vdc	48 Vdc	12 Vdc	24 Vdc	48 Vdc	48 Vdc
Battery input range	9.5 - 17 Vdc	19 - 34 Vdc	38 - 60 Vdc	9.5 - 17 Vdc	9.5 - 17 Vdc	19 - 34 Vdc	38 - 60 Vdc	19 - 34 Vdc	38 - 60 Vdc	9.5 - 17 Vdc	19 - 34 Vdc	38 - 60 Vdc	38 - 60 Vdc
Continuous power 25°C	650 ¹ /500 VA	800 ¹ /650 VA	900 ¹ /750 VA	1500 VA	2000 VA	2000 VA	2000 VA	3000 VA	3500 VA	2500 VA	4500 VA	5000 VA	7000 VA
Power 30 min. 25°C	900 ¹ /700 VA	1200 ¹ /1000 VA	1400 ¹ /1200 VA	1500 VA	2000 VA	2400 VA	2600 VA	3500 VA	4000 VA	3000 VA	5000 VA	6000 VA	8000 VA
Power 5 sec. 25°C	2.3 kVA	2.5 kVA	2.8kVA	3.4 kVA	4.8 kVA	6 kVA	6.5 kVA	9 kVA	10.5 kVA	7.5 kVA	12 kVA	15 kVA	21 kVA
Maximum efficiency	93%	93%	93%	93%	93%	94%	96%	94%	96%	93%	94%	96%	96%

Output voltage ⁽²⁾ pure sine wave 230 Vac (± 2%)/120 Vac ⁽³⁾

Output frequency ⁽²⁾ 50 Hz ± 0.05% (crystal controlled) 45-65 Hz programmable ⁽³⁾

Load detection (stand-by) ⁽²⁾ 2 to 25 W

Consumption OFF/Stand-by/ON	1.1/1.4/7 W	1.2/1.5/8 W	1.3/1.6/8 W	1.2/1.4/8 W	1.2 /1.4/10 W	1.4/1.6/9 W	1.8/2/10 W	1.4/1.6/12 W	1.8/2.1/14 W	1.2/1.4/14 W	1.4/1.8/18 W	1.8/2.2/22 W	1.8/2.4/30 W
-----------------------------	-------------	-------------	-------------	-------------	---------------	-------------	------------	--------------	--------------	--------------	--------------	--------------	--------------

Battery charger

Maximum charging current ⁽²⁾	35 A	25 A	12 A	70 A	100 A	55 A	30 A	90 A	50 A	160 A	140 A	100 A	120 A
---	------	------	------	------	-------	------	------	------	------	-------	-------	-------	-------

Transfer

Input voltage and frequency ⁽²⁾	150 to 265 Vac /50 to 140 Vac ³ 45 to 65 Hz	150 to 265 Vac /50 to 140 Vac ³ and 45 to 65 Hz							150 to 265 Vac /50 to 140 Vac ³ and 45 to 65 Hz				
--	--	--	--	--	--	--	--	--	--	--	--	--	--

Input current max. (transfer relay)/Output current max	16 Aac /20 Aac			50 Aac /56 Aac						50 Aac /56 Aac			50 / 80 Aac	
--	----------------	--	--	----------------	--	--	--	--	--	----------------	--	--	-------------	--

Transfer time	< 15 ms			< 15 ms						< 15 ms				
---------------	---------	--	--	---------	--	--	--	--	--	---------	--	--	--	--

General data

Weight	8.2 kg	9 kg	9.3 kg	15 kg	18.5 kg	16.2 kg	16.2 kg	21.2 kg	22.9 kg	34 kg	40 kg	42 kg	46 kg
--------	--------	------	--------	-------	---------	---------	---------	---------	---------	-------	-------	-------	-------

Dimensions h/w/l	110/210/310 mm			133/322/466 mm						230/300/500 mm				
------------------	----------------	--	--	----------------	--	--	--	--	--	----------------	--	--	--	--

Conformity low voltage directive (LVD) 2014/35/EU: EN/IEC 62477-1, 62109-1, 62109-2, 62040-1, electromagnetic compliance (EMC) directive 2014/30/EU: EN/IEC 61000-3-2, 61000-3-3, 61000-6-2, 61000-6-4, 62040-2


Ingress Protection (IEC60529)	IP54			IP20						IP20				
-------------------------------	------	--	--	------	--	--	--	--	--	------	--	--	--	--

Multifunction I/O	In opt. 2 AUX relays with ARM-02 In opt. digital input with RCM-10			Included: 2 potential free AUX relays In option: digital input with RCM-10 module						Included: 2 potential free AUX relays 1 digital input				
-------------------	---	--	--	--	--	--	--	--	--	--	--	--	--	--


⁽¹⁾ These features are valid only when using the cooling module ecf 01 | ⁽²⁾ Adjustable with the rcc 02/03 | ⁽³⁾ 120 V/60 Hz on request available for all Xtender except xth 8000-48

Functionalities

- Fully programmable with RCC, 400 parameters to adapt to any situations
- Maximum load up to short-circuit, reduces its voltage after 3 seconds to try to stabilize
- Asymmetric load up to pcont.
- Cos φ 0.1-1 | Harmonic distortion < 2 %
- warning before shut-off - with automatic restart
- Overload and short-circuit protection automatic disconnection with 3 times restart attempt
- Overheat protection
- Charge characteristic⁽²⁾ 6 steps: bulk, absorption, floating, equalization, reduced floating, periodic absorption
- Temperature compensation⁽²⁾ with bts 01 or bsp 500/1200
- Correction du facteur de puissance (PFC) EN 61000-3-2

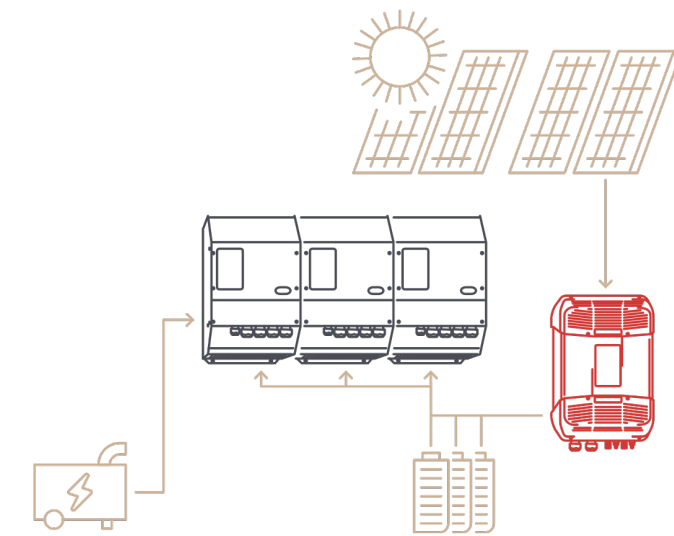


Variotrack

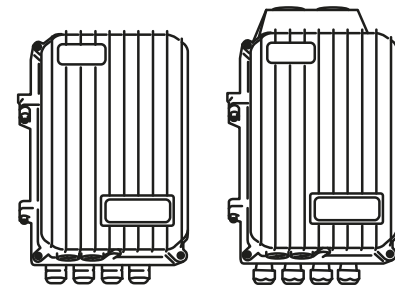


Technical specifications


The Variotrack is the low voltage MPPT solar charge controller for applications with Xtender (direct compatibility in the communication bus) and the next (in combination with the xcom 485i communication gateway).

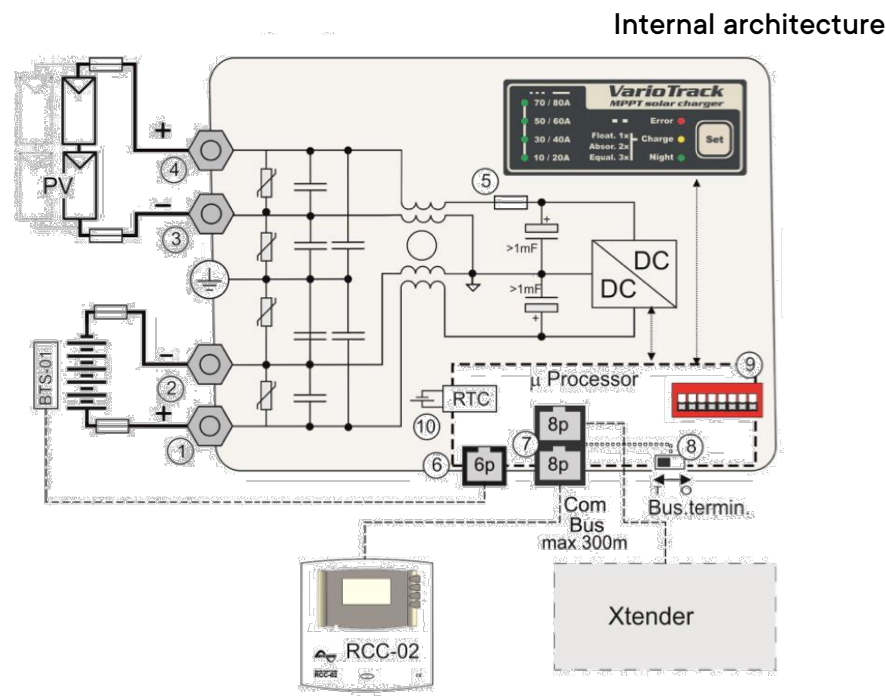

Variotrack ambient temperature derating

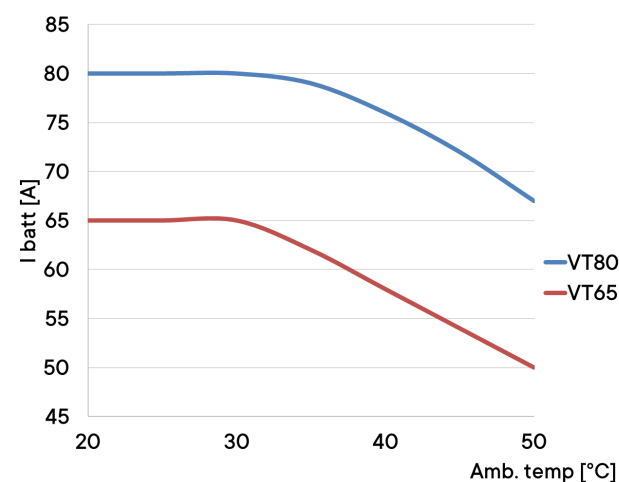

VarioTrack efficiency with 48V battery

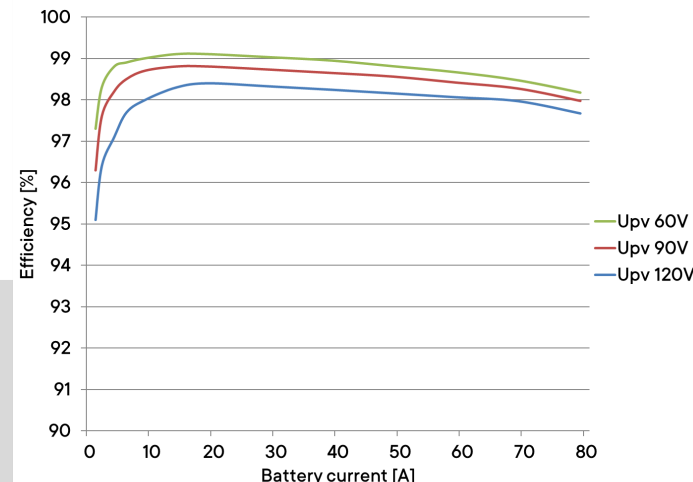

Efficiency and temperature derating curves

VT-40

VT-65

VT-80


Battery voltage	One model for all battery voltage Automatic/manual selection of nominal operation to 12/24/48 Vdc								
Battery voltage input range	7 - 68 V								
Battery charger									
Nominal battery voltage	12 V	24 V	48 V	12 V	24 V	48 V	12 V	24 V	48 V
Max. output current	40 A			65 A			80 A		
Operating battery voltage range	7-18V	16-32V	36-68V	7-18V	16-32V	36-68V	7-18V	16-32V	36-68V
Solar PV									
Max. solar power recom (@STC)	625 W	1250 W	2500 W	1000 W	2000 W	4000 W	1250 W	2500 W	5000 W
Maximum current PV	35 A			60 A			75 A		
Max. solar open circuit voltage	80 Vdc	150 Vdc	150 Vdc	80 Vdc	150 Vdc	150 Vdc	80 Vdc	150 Vdc	150 Vdc
Max. solar functional circuit voltage	75 Vdc	145 Vdc	145 Vdc	75 Vdc	145 Vdc	145 Vdc	75 Vdc	145 Vdc	145 Vdc
Min operating solar PV voltage	above the battery voltage								
European weighted efficiency	>97%								
Tracking efficiency	>99%								
Options									
Cooling fan ecf 01				in option, increase current to 80A nominal			included		
General data									
Weight	3.8 kg			5.2 kg			5.5 kg		
Dimensions h/w/l	120 / 220 / 310 mm			120 / 220 / 310 mm			120 / 220 / 350 mm		
Max. standby consumption	< 35mA (0.5 W)	<30mA (0.8 W)	< 25mA (1.2 W)	< 35mA (0.5 W)	<30mA (0.8 W)	< 25mA (1.2 W)	< 35mA (0.5 W)	< 30mA (0.8 W)	< 25mA (1.2 W)
Conformity	low voltage directive (LVD) 2014/35/EU, 62109-1, electromagnetic compliance (EMC) directive 2014/30/EU, 61000-3-3, 61000-6-2, 61000-6-4								
Ingress Protection IEC60529	IP54								
Mounting location	indoor, outdoor								
Operating temperature range	-20 to 55°C								
Relative humidity	100 % (non-condensing)								
Max. wire size/cable	glands 35mm ² /M20x1.5								

Max PV installed power (Watt-peak)

	12 V	24 V	48 V
VT-40	500 W _p	1000 W _p	2000 W _p
VT-65	1000 W _p	2000 W _p	4000 W _p
VT-80	1250 W _p	2500 W _p	5000 W _p
Voc max	<80V	<150V	<150V





Variostring

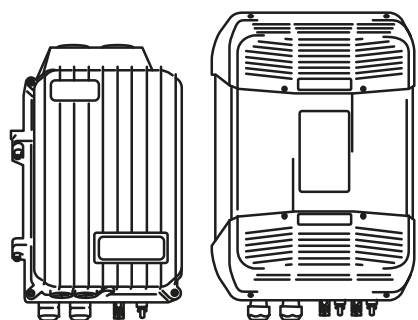

Technical specifications

The Variostring is the high voltage MPPT solar charge controller for applications in 48V with Xtender (direct compatibility in the communication bus) and with the next (in combination with the xcom 485i communication gateway).

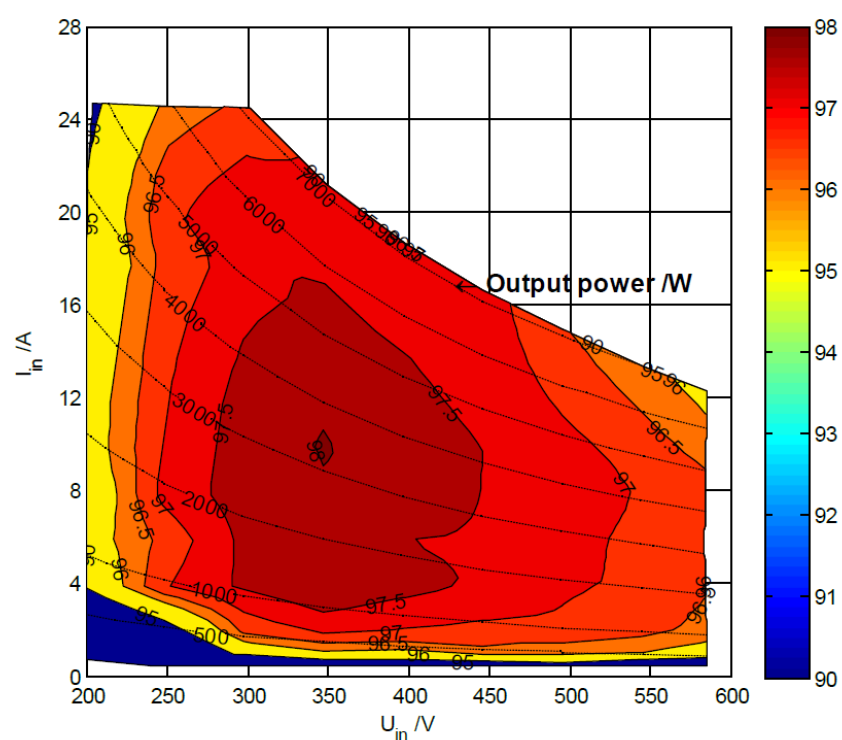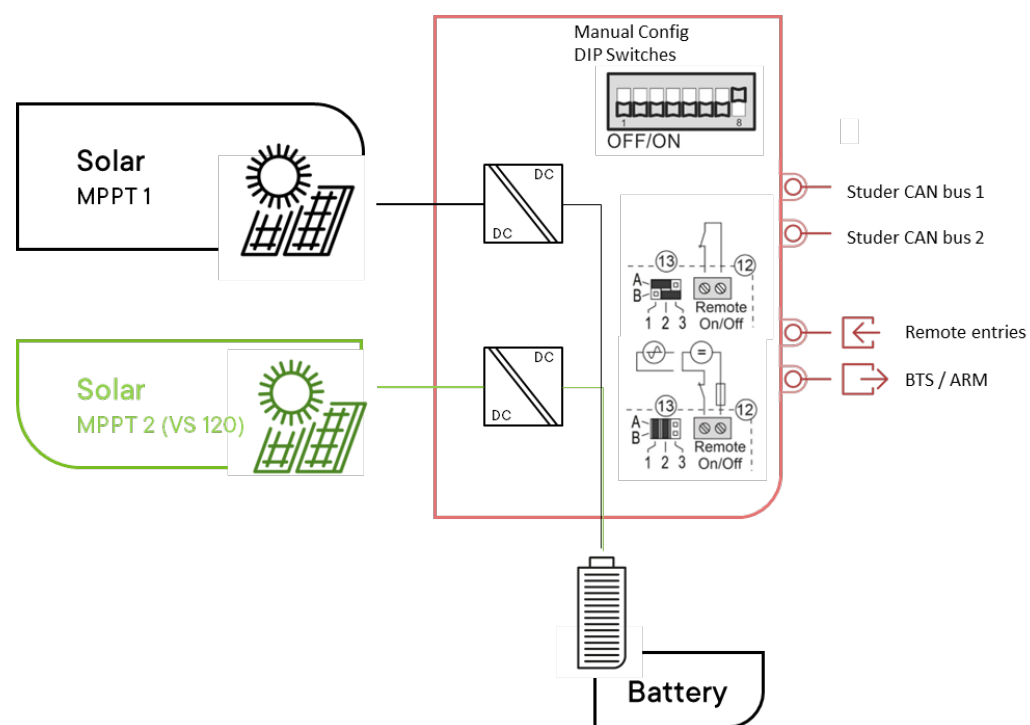


Measured Efficiency
by university of applied
science western
Switzerland

VS-120, 2 inputs in
parallel, Batt 60V


	VS-70		VS-120	
	1 MPPT input	MPPT 1/2	1+2 in parallel	1+2 in series
Solar PV				
Max. solar power recommended (@STC)	4200 W	3500 W	7000 W	7000 W
Maximum current PV	13 A	13 A	26 A	13 A
Max. solar open circuit voltage	600 V	600 V	600 V	900 V
Min. solar functional circuit voltage	100 V	100 V	100 V	200 V
Recommended MPP voltage	250 - 500 V	250 - 500 V	250 - 500 V	500 - 750 V
MPPT tracking efficiency	> 99.8 %			
Max. efficiency	98 %			
PV connectors	supplied Sunclix PV connectors			
Battery charger				
Max. output current	70 A	60 A	120 A	120 A
Nominal battery voltage (Input range)	48 V		48 V	
Operating voltage range	38 - 68 V		38 - 68 V	
Battery grounding possibility	battery + or battery		battery + or battery	
Max. standby consumption	< 20 mA (1 W)		< 25 mA (1.25 W)	
General data				
Weight	5.51 kg		7.5 kg	
Dimensions h/w/l mm	120 / 220 / 350 mm		133 / 322 / 466 mm	
Ingress Protection according to IEC60529	IP54		IP20	

low voltage directive (LVD) 2014/35/EU: EN/IEC 62109-1
electromagnetic compliance (EMC) directive 2014/30/
EU: EN/IEC 61000-6-2, 61000-6-4

Conformity

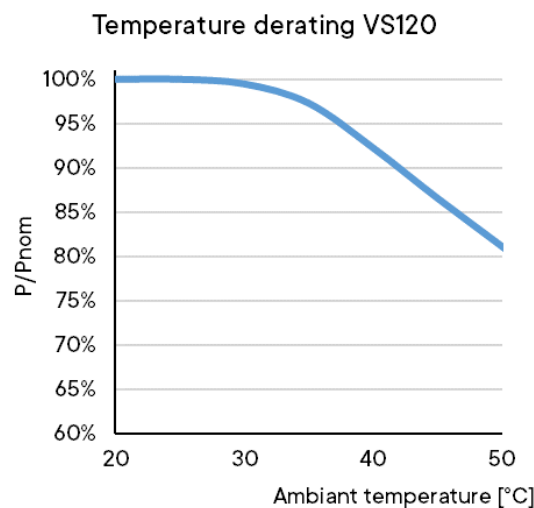






VS-120: two flexible MPPT inputs

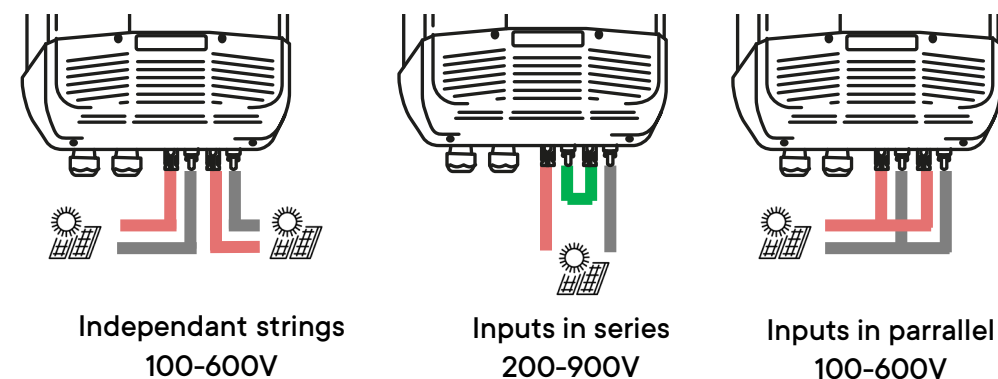

Xtender + Vario accessories



compatibility

XTS XTM XTH VS VT

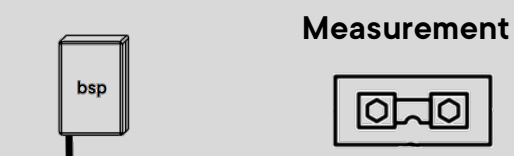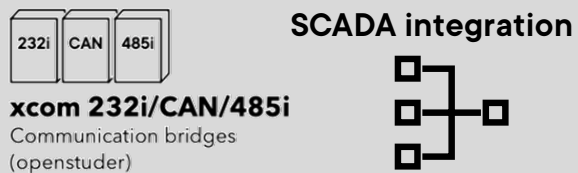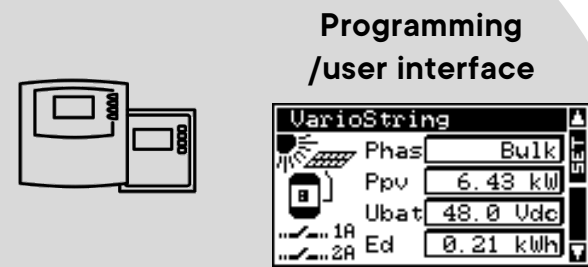

RCC	02/ 03	The remote control module (with 2m cable) enables the setting of the parameters and the display of the values measured. With the SD card it is possible to log the system data and to save and restore the parameters of the system. This module is available either for wall mounting (RCC-02), or for panel mounting (RCC-03).	•	•	•	•	•
	GSM 4G	Connect your system to the Studer-Portal with 4G with the Xcom-GSM	•	•	•	•	•
	LAN	Connect your system to your local router, internet and the Studer-Portal	•	•	•	•	•
XCOM	CAN	CAN communication with Lithium BMS It can be also configured to be a communication bridge in CAN with an open protocole	•	•	•	•	•
	485i	Communication bridge for MODBUS RTU	•	•	•	•	•
	232i	Communication bridge for RS232	•	•	•	•	•
BSP	500 / 1200	Battery Status Brocessor: shunt measurement to compute the SOC of lead acid batteries, shunts available in 500A or 1200A	•	•	•	•	•
BTS	01	Battery temperature sensor	•	•	•	•	•
ARM	02	Auxiliary remote module	•			•	•
RCM	10	Remote Control Module	•	•			
ECF	01	External Cooling Fan: the use of this accessory will increase the power of the XTS and the current of the VT65 to 80 A.	•				•
X-connect		Mounting frame for multi-XTH system, supplied as a kit. The frame is equipped with DC breakers and fuses, and with rail DIN for the mounting of protection devices upstream				•	
CAB-RJ45-8-xx		Communication cable for the connection between Xtenders and all external accessories. The cables are available in the following lengths: 2, 5, 10, 20 or 50m (xx for the length). For instance: one system with 3 Xtenders requires 2 cables of 2m. One cable is supplied with every accessory. However, a longer cable can be ordered when necessary.	•	•	•	•	•

AJ


AJ 275-12
AJ 350-24
AJ 400-48
AJ 500-12
AJ 600-24
AJ 700-48
AJ 1000-12
AJ 1300-24
AJ 2100-12
AJ 2400-24
Inverter Onduleur

Nominal battery voltage (Input range)	12 Vdc (10.5 - 16 Vdc)	24 Vdc (21 - 32 Vdc)	48 Vdc (42 - 60 Vdc)	12 Vdc (10.5 - 16 Vdc)	24 Vdc (21 - 32 Vdc)	48 Vdc (42 - 60 Vdc)	12 Vdc (10.5 - 16 Vdc)	24 Vdc (21 - 32 Vdc)	12 Vdc (10.5 - 16 Vdc)	24 Vdc (21 - 32 Vdc)
Continuous power @ 25°C	200 VA	300 VA	300 VA	400 VA	500 VA	500 VA	800 VA	1000 VA	2000 VA	2000 VA
Power 30 min. @ 25°C	275 VA	350 VA	400 VA	500 VA	600 VA	700 VA	1000 VA	1300 VA	2100 VA	2400 VA
Power 5 min. @ 25°C	350 VA	500 VA	600 VA	575 VA	675 VA	900 VA	1200 VA	2000 VA	2450 VA	2800 VA
Power 5 sec. @ 25°C	450 VA	650 VA	1000 VA	1000 VA	1200 VA	1400 VA	2200 VA	2800 VA	5000 VA	5200 VA
Asymmetric load	150 VA	150 VA	200 VA	250 VA	300 VA	300 VA	500 VA	600 VA	1000 VA	1200 VA
Max. efficiency (%)	93 %	94 %	94 %	93 %	94 %	94 %	93 %	94 %	92 %	94 %
Cos φ max.	0.1-1 to 200 VA	0.1-1 to 300 VA	0.1-1 to 300 VA	0.1-1 to 400 VA	0.1-1 to 500 VA	0.1-1 to 500 VA	0.1-1 to 800 VA	0.1-1 to 1000 VA	0.1 - 1 up to 2000 VA	
Detection of the load	2 W only with the solar option -S			Adjustable: 1 to 20 W			2 W only with the solar option -S		Adjustable: 1 to 20 W	
Short-circuit current AC 2 sec.	2.3 Aac (4.6 Aac*)	3.2 Aac (6.4 Aac*)	4.6 Aac (9.2 Aac*)	5.2 Aac (10.4 Aac*)	5.7 Aac (11.4 Aac*)	7 Aac (14 Aac*)	10 Aac (20 Aac*)	13 Aac (26 Aac)	26 Aac (52 Aac*)	30 Aac (60 Aac*)
Output voltage	Sine wave 230 Vac (120 Vac*) ±5 %									
Distortion THD (resistive load)	< 3 % (@ Pnom & Uin nom.)									
Frequency	50 Hz (60 Hz*) ± 0.05 % (crystal controlled)									
Consumption Stand-by / ON no load	0.3 W**/ 2.4 W	0.5 W**/ 3.5 W	1.1 W**/ 5.2 W	0.4 W/ 4.6 W	0.6 W/ 7.2 W	1.5 W/ 12 W	0.7 W/ 10 W	1.2 W/ 13 W	0.7 W/ 16 W	1.2 W/ 16 W
Reverse polarity protection intern fuse	60 A	40 A	25 A	120 A	90 A	60 A	125 A	100 A	Not protected	150 A

General data

Weight	2.4 kg	2.6 kg	2.6 kg	4.5 kg			8.5 kg	19 kg	18 kg	
Dimensions h/w/l	142 / 163 / 84 mm			142 / 240 / 84 mm			142 / 428 / 84 mm		273 / 399 / 117 mm	
Length cables (battery/AC out)	1.2 m / 1 m			1.5 m / 1 m			1.5 m / 1 m		1.7 m / 1 m	
Acoustic level	< 45 dB (with ventilation)									
Conformity	low voltage directive (LVD) 2014/35/EU: EN/IEC 62109-1, 62109-2, 62477-1, electromagnetic compliance (EMC) directive 2014/30/EU: EN/IEC 61000-3-3, 61000-6-2, 61000-6-4, 62040-2									
Ingress protection of enclosures	IP30			IP30			IP30		IP20	
Operating temperature range	-20 to 50°C									
Approximate correction of Pnom	-1.5 % / °C from + 25°C									
Relative humidity	95 % (non-condensing)									

Solar Options

Voltage max	25 Vdc	45 Vdc	90 Vdc	25 Vdc	45 Vdc	90 Vdc	25 Vdc	45 Vdc	25 Vdc	45 Vdc
Current max	10 Adc			15 Adc			25 Adc		30 Adc	
Principle	Floating 3 stages (I/U/UO)									
Absorption voltage	14.4 Vdc	28.8 Vdc	57.6 Vdc	14.4 Vdc	28.8 Vdc	57.6 Vdc	14.4 Vdc	28.8 Vdc	14.4 Vdc	28.8 Vdc
Floating voltage	13.6 Vdc	27.2 Vdc	54.4 Vdc	13.6 Vdc	27.2 Vdc	54.4 Vdc	13.6 Vdc	27.2 Vdc	13.6 Vdc	27.2 Vdc

Control Options

rcm01/02/03



rcm01/02/03

jt8


jt8

Functionalities

- Overheat protection (±5°C) Shut down @ 75°C - Auto-restart @ 70°C
- Overload and short circuit protection Automatic disconnection with 2 times restart attempt
- Deep discharge battery protection Shut off @ 0.87 x Unom - Automatic restart @ Unom
- Max. battery voltage Shut off @ >1.33 x Unom - Automatic restart @ < Umax
- Acoustic alarm Before low battery or overheating disconnection
- Ventilation forced from 45°C ± 5°C | Length

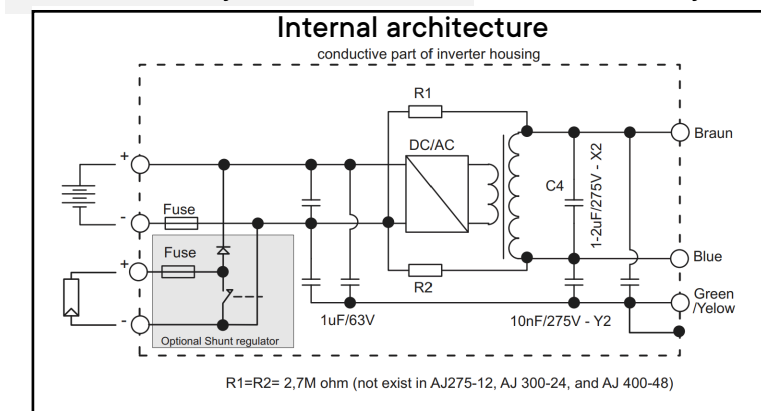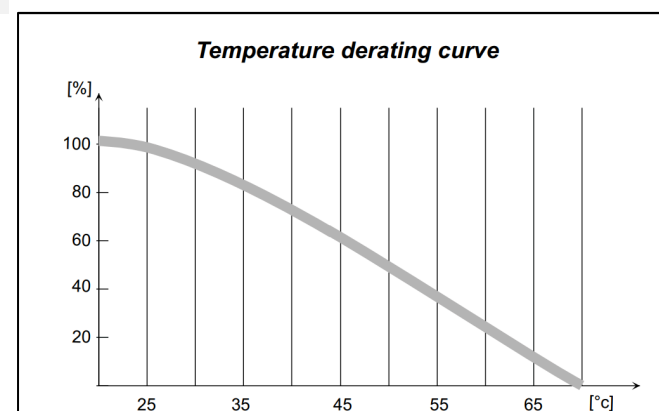

Products naming

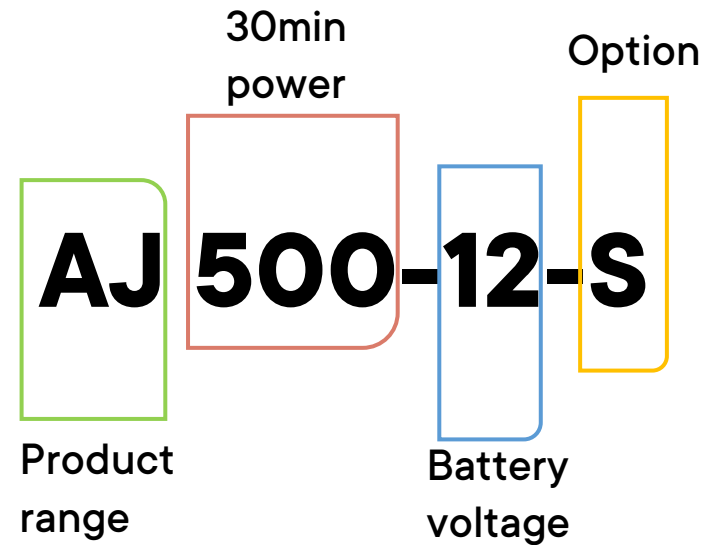

Standard inverters models without –option are always 230Vac and 50Hz output voltage

AJ series - Sine wave inverters

Type	Input Vdc	Power 30' VA	Cont. power VA	Output Vac	Built-in solar Regulator (option -S) A/Vmax	lxwxh mm	Weight kg
AJ 275-12	12	275	200	230	10A / 25V	163x142x84	2.55
AJ 350-24	24	350	300	230	10A / 45V	163x142x84	2.75
AJ 400-48	48	400	300	230	10A / 90V	163x142x84	2.85
AJ 500-12	12	500	400	230	15A / 25V	240x142x84	4.6
AJ 600-24	24	600	500	230	15A / 45V	240x142x84	4.65
AJ 700-48	48	700	500	230	15A / 90V	240x142x84	4.6
AJ 1000-12	12	1000	800	230	25A / 25V	428x142x84	8.6
AJ 1300-24	24	1300	1000	230	25A / 45V	428x142x84	8.65
AJ 2100-12	12	2100	2000	230	30A / 25V	399x273x117	19.5
AJ 2400-24	24	2400	2000	230	30A / 45V	399x273x117	18.15
JT 8	Remote control box from 1000-12 to 2400-24 S, incl. 5 m cable					58x51.5x22	0.3
RCM-01/02/03	Remote control plug from 275-12 to 700-48 S supplied mounted - factory setting as per requirement						

Model options

- S solar regulator included
- 01 version 120Vac/60Hz
- 02 version 120Vac/50Hz
- 03 version 220Vac/60Hz
- rcm01 version with remote command with unit that start when contact closed on rcm input
- rcm02 version with remote command used as a press button
- rcm03 version with remote command with unit that start when contact open on rcm input

Next series - Smart inverter-chargers / transfersystem, integrated solar for Next3

Type	Input Vdc	Power 30' VA	Cont. power VA	Output Vac	Charger A	lxwxh mm	Weight kg
nx3-16000-48 sti	48	16000	15000	230	0-300	310x210x110	58
nx1-6500-48	48	6500	4500	230	0-125	420x550x175	36
nx1-5000-24	24	500	3500	230	NYA	420x550x175	33
nx1	nx-interface touchscreen						
nx wifiDongle	compatible usb wifi dongle						
nx tempSensor	temperature sensor for remote sensing of lead acid batteries						
nx bypass box	an threephase automatic transfer switch with or without an emergency stop on it.						
nx pm	Power meter with Modbus RTU communication for nx3, 60A*						
Model options							
nx3	-sti (defaultl)				nx1	-us: 120V/60Hz option	-rack: 19" rack version
	-st =without nx-interface for second unit in //						
	-rack: 19" rack version						

Xtender series - Sine wave inverter-chargers / transfer system - with Smart-Boost

Type	Input Vdc	Power 30' VA	Cont. power VA	Output Vac	Charger A	lxwxh mm	Weight kg
XTS 900-12	12	900*/700	650*/500	230	0-35	310x210x110	11.1
XTS 1200-24	24	1200*/1000	800*/650	230	0-25	310x210x110	10.85
XTS 1400-48	48	1400*/1200	900*/750	230	0-12	310x210x110	10.75
XTM 1500-12	12	1500	1500	230	0-70	322x466x133	16.4
XTM 2000-12	12	2000	2000	230	0-100	322x466x133	22.45
XTM 2400-24	24	2400	2000	230	0-55	322x466x133	18
XTM 2600-48	48	2600	2000	230	0-30	322x466x133	17.55
XTH 3000-12	12	3000	2500	230	0-160	500x300x230	29.35
XTM 3500-24	24	3500	3000	230	0-90	322x466x133	23.95
XTM 4000-48	48	4000	3500	230	0-50	322x466x133	25.3
XTH 5000-24	24	5000	4500	230	0-140	500x300x230	35.1
XTH 6000-48	48	6000	5000	230	0-100	500x300x230	38.55
XTH 8000-48	48	8000	7000	230	0-120	500x300x230	44.75

Model options

- 01 version 120Vac/60Hz except XTH 8000-48
- *With ECF-01

VarioTrack/VarioString - MPPT Solar Charge Controllers

Type	Battery voltage Vdc	PV voltage Vdc	Max. current A	Max PV power W	lxwxh mm	Weight kg
VT-40	12, 24, 48	up to 150	40	2500	310x220x120	3.8
VT-65	12, 24, 48	up to 150	65	4000	310x220x120	6.1
VT-80	12, 24, 48	up to 150	80	5000	350x220x120	6.5
VS-70	48	up to 600	70	4200	350x220x120	6
VS-120	48	up to 900	120	7000	466x322x133	9.55

Accessories for Xtenders and VarioTrack/VarioString systems

X-Connect	Mounting system for 3 XTH units	981x917x29	28.5
RCC-02	Remote control and programming centre + 2 m cable for wall mounting	170x168x43.5	
RCC-03	Remote control and programming centre + 2 m cable for panel mounting	130x120x42.2	
Xcom-CAN	CAN to CAN interface with 2x 2 m cable	110.5x75x26	
Xcom-485i	Modbus RTU Gateway with 2x 2 m cable	110.5x75x26	
Xcom-232i	Isolated RS232 communication module with 2 m cable	110.5x75x26	
Xcom-LAN	Internet based communication set, with Ethernet bridge and 2 m cable		
Xcom-GSM	Internet based communication set, with GSM modem and 2 m cable		
RCM-10	Remote command module for XTS/XTM with 5 m cable	78x45x37	
ECF-01	IP 54 cooling fan module for XTS	60x210x110	
ARM-02	Auxiliary relay module for XTS & VT (2 programmable relays) with 5 m cable	45x73x45	
BTS-01	Battery temperature sensor with 5 m cable	58x51.5x22	
BSP 500	Battery status processor with 500A shunt & 5 m cable	110.5x75x26	
BSP 1200	Battery status processor with 1200A shunt & 5 m cable	110.5x75x26	

Cables

CAB-RJ45-8-2	Cable type RJ45 8 pins - 2 m - for parallelization and 3-phase implementation
CAB-RJ45-8-5	Cable type RJ45 8 pins - 5 m - for RCC-01 / RCC-02 / RCC-03 ...etc
CAB-RJ45-8-20	Cable type RJ45 8 pins - 20 m - for RCC-01 / RCC-02 / RCC-03 ...etc
CAB-RJ45-8-50	Cable type RJ45 8 pins - 50 m - for RCC-01 / RCC-02 / RCC-03 ...etc
CAB-RJ45-8-...	Cable type RJ45 8 pins - per m - for RCC-01 / RCC-02 / RCC-03 ...etc
RACC-RJ45-8-F/F	Connector Female/Female for 8 pins RJ45 cable (for RCC-01 / RCC-02 / RCC-03)
Y-RJ45-8	Y connector for 8 pins cable
CAB-RJ11-6-5	Cable type RJ11 6 pins - 5 m (for CT-35 / RPS-01 / BTS-01)
CAB-RJ11-6-...	Cable type RJ11 6 pins - per m (for CT-35 / RPS-01 / BTS-01)
RACC-RJ11-6-F/F	Connector Female/Female for 6 pins RJ11 cable (for CT-35 / RPS-01 / BTS-01)
Y-RJ11-6	Y connector for 6 pins cable (for CT-35 / RPS-01 / BTS-01)

Project references

Selection of international projects with Studer components





Check our case studies

studer-innotec.com/case-studies/

Contact us to share yours

Year	Project type	Rural electrification, solar home systems	Country
2007	Rural electrification	1000 systems for rural schools and health dispensers	Sri Lanka
2013	Rural electrification	1500 solar individual systems for rural electrification	Ecuador
2016	Rural electrification	90 individual solar off-grid systems in the Toconce region	Chile
2018	Rural electrification	Smart rural community Mistruck	Honduras
2017	Rural electrification	Euro-solar offgrid 600 kits project	Latam
2019	Rural electrification	Empowering Mushuk Lamas	Peru
2023	Rural electrification	Health clinics	India
2016	Minigrid	5 Solar minigrids for remote island communities	Ghana
2017	Minigrid	Mpale Solar minigrid for village electrification, Best offgrid project 2017 ARE	Tanzania
2019	Minigrid	Hybrid micro-grid at 4100m above sea level	Chile
2019	Minigrid	Hurri Hills solar minigrid for productive uses	Kenya
2017	Minigrid	Hydroelectric rural minigrid in Mohari village	Nepal
2022	Minigrid	Minigrid for agriculture activities	Myanmar
2024	Minigrid	Distributed minigrid	Colombia
2016	Offgrid	Offgrid centralized systems for street-lighting	Egypt
2018	Offgrid	Offgrid water pumping station	Colombia
2016	Offgrid	Off-grid lodge in a National Park	South Africa
2021	Offgrid	Ecofriendly and autonomous atmospheric water plant	Barbados
2015	Offgrid	Offgrid wastewater treatment system	Australia
2021	Offgrid	Sustainable offgrid resort in a Caribbean rainforest	Panama
2020	Offgrid	Offgrid system in a luxury apartment complex in Bangalore	India
2016	Offgrid	Wind and solar offgrid system to power 2 large chicken sheds	Ireland
2019	Offgrid	Capana Gnifetti, hybrid system at 3647m	Italy
2023	Offgrid	+150 microgrids rural communities with genset sync	India
2018	Telecom	Italezpi offgrid telecommunication system	Spain
2019	Telecom	Repowering telecom remote stations Viva with DC solar fuel saving	Bolivia
2020	Telecom	Telefonica hybrid systems to reduce diesel consumption	Peru
2018	Backup	UPS backup system at Kenya's first green certified building Dunhill Towers	Kenia
2021	Backup	Nammene Industries grid backup and self-consumption system	India
2006	Mobile	Pepamobil, truck tour of America	Paraguay
2019	Mobile	Solar butterfly world tour	Switzerland
2023	Mobile	Peak Evolution, World high-altitude record with EV	Chile
2022	Ongrid	Self-sufficient home with EV	Switzerland
2023	Ongrid	Solar+wind self-sufficient country residence	Sweden
2024	Ongrid	Autonomous residence with EV	Slovakia



Reliable power and energy for everyone, everywhere





Built to last



All our products are designed and manufactured in our factory in Sion in Switzerland and come with an exceptional warranty of 10 years.

Studer Innotec SA
Rue des Casernes 57
1950 Sion, Switzerland
+41 (0)27 205 60 80
info@studer-innotec.com

ISO certified factory
9001:2020/14001:2020.

April 2024 - v1.3
© All rights reserved Studer Innotec SA.
May change without notice



Cover: Rural minigrid in Nepal, photo by RIDS-Nepal
Here: Zermatt village at the foot of the Matterhorn mountain, close to Studer factory

